


DEPA[®]

BA-DL-GB/08.15

Air Operated Diaphragm Pumps

Operating and
Installation Instructions
Installation, Operation
and Maintenance

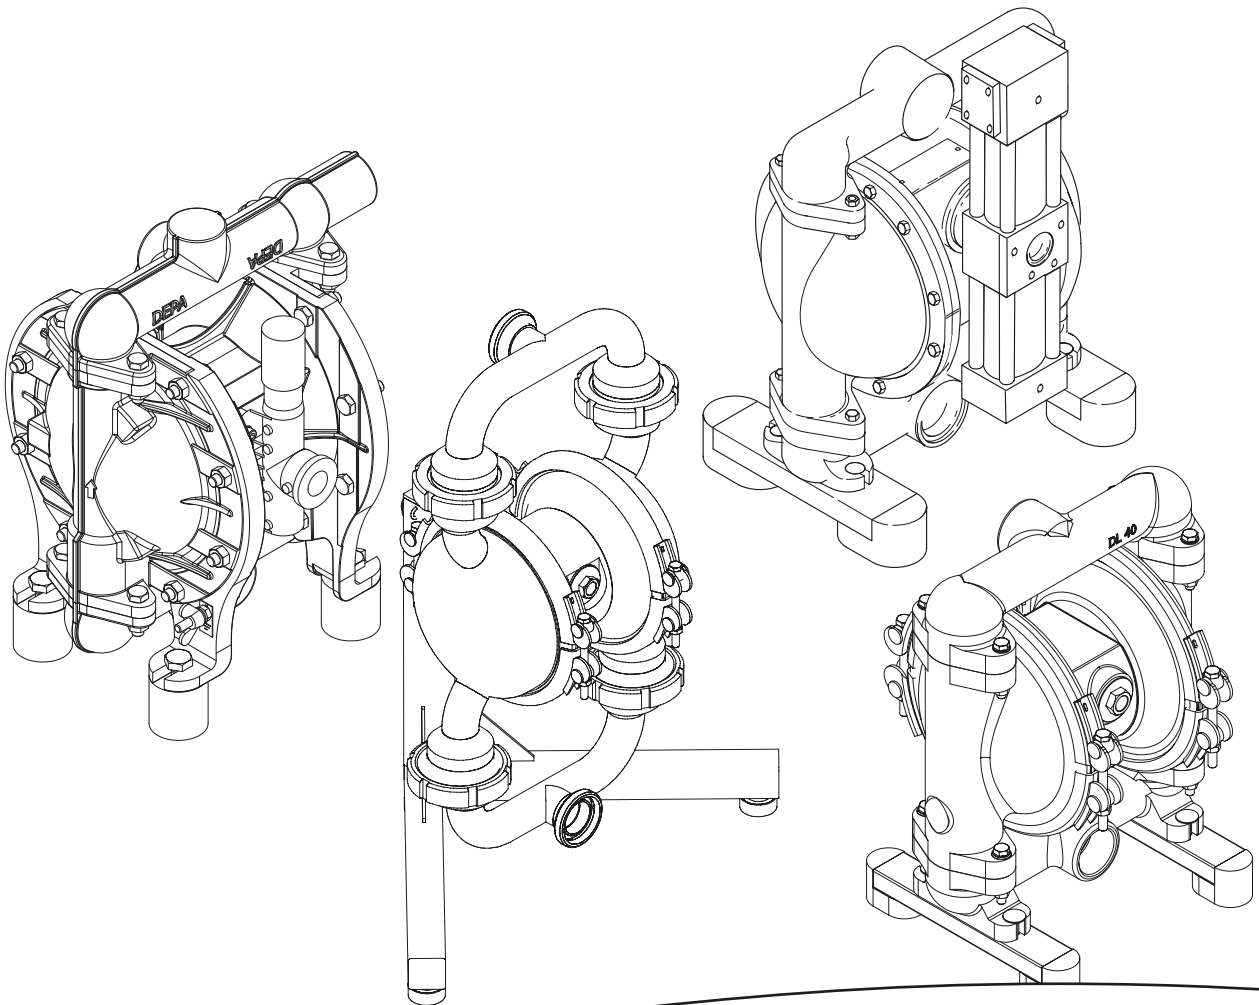

CRANE[®]

www.depapumps.com
www.cranecpe.com

**This is the translation of the original declaration of conformity
for DEPA Air Operated Diaphragm Pumps.**



EC Declaration of Conformity

in compliance with the Machinery Directive 2006/42/EC

We hereby declare, that the pump units manufactured in series production

Designation: DEPA Air Operated Diaphragm Pumps
DEPA Active Pulsation Dampers

Series: DL, DH, DF, DZ, DP, DB

Manufacturer: Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71
40549 Düsseldorf

Serial number: see identification plate

in the version delivered by us, is in compliance with the following applicable regulations:

EC Machinery Directive: 2006/42/EC

Harmonized standards: DIN EN 809:2012-10
DIN EN ISO 12100:2011-03

Mr. Ralf Rennwanz is authorized to compile the technical documents.

Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71
40549 Düsseldorf

Place, date Düsseldorf, 08/07/2015

Signature of manufacturer: 

Information on signatory: Hans-Dieter Ptak, Managing Director

Declaration of Incorporation

for partly completed machinery
according to the machinery directive 2006/42/EC

The manufacturer Crane Process Flow Technologies GmbH,
Heerdter Lohweg 63-71, 40549 Düsseldorf,

declares that with the series production pulsation dampers

Designation: DEPA compressed air diaphragm pumps without air control

Series: DJ, PD, PH

Serial number: see identification plate

the following basic requirements as specified in annex I of the above directive have been applied and complied with:

General principles No. 1

Nr. 1.1, 1.3, 1.5, 1.6; 1.7, 2.1, 3.4, 3.6, 4.1 und 4.2

Commissioning is prohibited until it has been determined that the machine into which the above specified machine shall be incorporated meets the machinery directive 2006/42/EC.

Pay attention to the installation instructions in Chapter 3 and 7.2 of these operating instructions.

The special technical documents were prepared in compliance with annex VII part B of the directive. The previously mentioned special technical documents will be made available to the competent authority by mail, if this should be necessary.

EC directive: Machinery directive 2006/42/EC


Harmonized standards: DIN EN ISO 12100:2011-03,
DIN EN 809:2012-10

Mr. Ralf Rennwanz is authorized to compile the technical documents.

Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71
40549 Düsseldorf

Place / date: Düsseldorf, 08/07/2015

Signature of manufacturer:



Information on signatory: Hans-Dieter Ptak, Managing Director



ATEX



EC Declaration of Conformity

in accordance with directive 94/9/EC for equipment intended for use in potentially explosive atmospheres

| | |
|--|--|
| The manufacturer | Crane Process Flow Technologies GmbH, Heerdter Lohweg 63-71, 40549 Düsseldorf, |
| declares that the pump units manufactured in series production | |
| Designation: | DEPA Air Operated Diaphragm Pumps and DEPA Active Pulsation Dampers |
| Series: | DL, DH, DF, DZ, DJ, DP, und PD, PH |
| Casing material: | Type A: FA-, CA-, SA-, SF-, SL-, SU-, UE- Type B: CX-, SX-, PL-, TL-, SS-, SFS |
| Diaphragm materials: : | electrically conductive / electrically dissipative DEPA nopped E4® compound diaphragm PTFE with EPDM back diaphragm EPDM, NBR, NRS non-electrically conductive / non-electrically dissipative for DN 15, 25, 40 and 50 DEPA nopped S4®, FKM, EPDM grey |
| Accessories: | Type A: Start-up valve, service unit, clamping adapter, trolley, fluidisation, Ball lifter Type B Needle valve, level control, trolley, fluidisation system, collecting pan, suction lance, high-performance silencer, suction and pressure hose, Ball lifter |
| Installed electrical components: | Specific manufacturer's declarations of conformity are supplied with all of the electrical units |
| in the version delivered by us, is in compliance with the following applicable regulations: | |
| EC-directive: | Directive 94/9/EC for equipment intended to be used in potentially explosive atmospheres |
| Conformity assessment method: | Pump and accessories type B Equipment group I, category M2 Pump and accessories type A and B Equipment group II, category 2GD, Explosion group IIB Tx |
| Harmonized standards: | DIN EN 1127-1:2008-02 (for pump and pulsation damper) EN 13463-1:2009-07 (for accessories) EN 13463-5:2011-10 (for accessories) |
| Mr. Ralf Rennwanz is authorized to compile the technical documents. Crane Process Flow Technologies GmbH Heerdter Lohweg 63-71 40549 Düsseldorf | |
| Place / date: | Düsseldorf, 08/07/2015 |
| Signature of manufacturer: | |
| Information on signatory: | Hans-Dieter Ptak, Managing Director |



EC Declaration of Conformity

in accordance with directive 94/9/EC for equipment intended for use
in potentially explosive atmospheres

The manufacturer Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71,
40549 Düsseldorf,

declares that the pump units manufactured in series production

Designation: DEPA Air Operated Diaphragm Pumps

Series: DL

Casing material: SS-

Diaphragm materials: **Electrically conductive / electrically dissipative
DEPA nopped E4® compound diaphragm*,
EPDM, NBR, PTFE***
*Size 80 only approved for electrically conductive fluids

Supplementary operating manuals: DEPA air operated diaphragm pumps
BA-DL-D/02.12

in the design supplied by us comply with the following relevant regulations:

EC-directive: Directive 94/9/EC for equipment to be used in
potentially explosive atmospheres

Conformity assessment method: Pump and accessories:
Equipment group II, category 1G,
explosion group IIB Tx
or II 1/2G IIB Tx

EU prototype examination certificate : Federal Physical-Technical Office (PTB) in Braunschweig
ID-No. 0102:
PTB 04 ATEX 4015 X
Testing rules of the PTB in connection with
DIN EN 1127-1:2008-02, EN 50014 2000:2 and
EN 13463-1:2009-07

**Nominated body for
quality assurance:** TÜV Nord Cert GmbH
Langemarkstr. 20, 45141 Essen,
ID-No. 0044

Mr. Ralf Rennwanz is authorized to compile the technical documents.

Place / date: Düsseldorf, 08/07/2015

Signature of manufacturer:

Information on signatory: Hans-Dieter Ptak, Managing Director



EC Declaration of Conformity

in accordance with directive 94/9/EC for equipment intended for use
in potentially explosive atmospheres

The manufacturer Crane Process Flow Technologies GmbH,
Heerdter Lohweg 63-71,
40549 Düsseldorf,

declares that the pump units manufactured in series production

Designation: DEPA Air Operated Diaphragm Pumps
Series: DB
Casing material: XSA
without pressure booster
Diaphragm materials: **Electrically conductive / electrically dissipative**
DEPA nopped E4® composite diaphragm
PTFE with EPDM back diaphragm
EPDM, NBR, NRS
Accessories: Start-up valve, service unit, clamping adapter, trolley
Installed electrical components: all electric units have their own declaration of conformity,
issued by the supplier

in the version delivered by us comply with the following applicable regulations:

EC-directive: Directive 94/9/EC for equipment to be used in
potentially explosive areas
Conformity assessment method: Pump and accessories:
Equipment group II; Category 2GD,
Explosion group IIB Tx
Harmonized standards: DIN EN 1127-1:2008-02 (for pump and pulsation damper)
EN 13463-1:2009-07 (for accessories)
EN 13463-5:2011-10 (for accessories)

Mr. Ralf Rennwanz is authorized to compile the technical documents.

Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71
40549 Düsseldorf

Place / date: Düsseldorf, 08/07/2015

Signature of manufacturer:

Information on signatory: Hans-Dieter Ptak, Managing Director



EC Declaration of Conformity

In the sense of the regulation EC No. 1935/2004 concerning materials and objects that are intended to come into contact with food

The manufacturer Crane Process Flow Technologies GmbH,
Heerdter Lohweg 63-71,
40549 Düsseldorf,

declares that the pump units manufactured in series production

Designation: DEPA – Air Operated Diaphragm Pumps and
DEPA Active Pulsation Dampers

Type: DL .. SLV PD .. SL
DL .. SUV PD .. SU
DL .. UEV PD .. UE
DH .. UEV PH .. UE

Size: DL/DH25, DL/DH40, DL/DH50, DL/DH80
PD/PH25, PD/PH40, PD/PH50, PD80

Diaphragms and ball valves made of: PTFE, EPDM - grey,
DEPA nopped E4® compound diaphragm

in the design delivered by us comply with the following regulations:

EC – Regulation: EC No. 1935/2004

Harmonized standards: DIN EN 1672 part 2 - 1997

Further applied standards and international guidelines: EHEDG Document No. 8, Report No. V4273
(valid for DL/DH-UEV with PTFE or EPDM grey model)
FDA 21 CFR 177.2600, "Rubber Articles"

Mr. Ralf Rennwanz is authorized to compile the technical documents.

Place, date: Düsseldorf, 08/07/2015

Signature of manufacturer: 

Information on signatory: Hans-Dieter Ptak, Managing Director



ATEX



EC Declaration of Conformity

in accordance with directive 94/9/EC for equipment intended for use
in potentially explosive atmospheres

The manufacturer: Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71
40549 Düsseldorf

declares that the pump unit manufactured in series production

Designation: DEPA Air Operated Diaphragm Pumps

Series: DL

Sizes: 15, 25, 40, 50, 80

Casing material: SS, PL

Diaphragm materials: EPDM, NBR

Valve ball materials: EPDM, NBR and PTFE only for size 15

in the version delivered by us comply with the following relevant regulations:

EC-Directive: Directive 94/9/EC for equipment to be used in potentially
explosive atmospheres

Harmonized standards: DIN EN 1127-1:2008-02

Mr. Ralf Rennwanz is authorized to compile the technical documents.

Crane Process Flow Technologies GmbH
Heerdter Lohweg 63-71
40549 Düsseldorf

Place / date: Düsseldorf, 08/07/2015

Signature of manufacturer:

Information of signatory: Hans-Dieter Ptak, Managing Director

DEPA® Air Operated Diaphragm Pumps

Table of contents

| | Page |
|---|-------------|
| 1.0. Introduction | 12 |
| 1.1 Warranty..... | 12 |
| 1.2 Transport, unpacking, storage..... | 12 |
| 1.3 Principle of function..... | 13 |
| 1.3.1 Functionality | 14 |
| 1.4 Technical data | 15 |
| 1.4.1 Dimensions, weights and temperatures | 15 |
| 1.4.2 Control air..... | 15 |
| 1.4.3 Air quality | 15 |
| 1.4.4 Particle sizes, suction heads..... | 15 |
| 2.0 Safety | 16 |
| 2.1. General information..... | 16 |
| 2.2 Danger sources..... | 16 |
| 2.3 Permitted operators..... | 16 |
| 2.4 Intended use | 16 |
| 2.5 Unintended use | 17 |
| 2.6 Conversions and alterations to the pump..... | 17 |
| 2.7 Symbols | 17 |
| 2.8 Maintenance and repair work..... | 17 |
| 2.9 Personal protective outfit..... | 18 |
| 2.10 Safety information for work on lines under pressure | 18 |
| 2.11 Safety during storage | 18 |
| 2.12 Noise emissions (2003/10/EC)..... | 19 |
| 2.13 Use of pumps in potentially explosive areas | 19 |
| 3.0 Installation | 19 |
| 3.1 To be considered before commissioning..... | 19 |
| 3.2 Design and arrangement of connecting lines..... | 20 |
| 3.3 Placement and possible installations of the pump | 20 |
| 3.4 Foundations | 20 |
| 3.5 Connection of the air supply line | 21 |
| 3.6 Connection of suction and pressure lines | 21 |
| 3.7 Pump in suction operation..... | 21 |
| 3.8 Pump in submerged operation | 21 |
| 3.9 Pump with pre-pressure | 22 |
| 3.10 Pump on drum | 22 |
| 3.11 Equipotential bonding / earthing..... | 22 |
| 3.12 Vibration distance..... | 22 |
| 3.13 Routing of exhaust air | 22 |
| 3.14 Installation instructions for incomplete machines (2006/42/EC, Append. VI..... | 23 |
| 4.0. Operation | 23 |
| 4.1. General | 23 |
| 4.2 Switching on the pump..... | 23 |
| 4.3 Flow control..... | 23 |
| 4.4 Switching off the pump..... | 23 |
| 4.5 What to do in events of emergency..... | 23 |
| 4.6 Remote operating indicator | 23 |

| | | |
|-------------|---|-----------|
| 4.7 | Diaphragm monitoring - conductive | 23 |
| 4.8 | Diaphragm monitoring - capacitive..... | 24 |
| 4.9 | Cleaning of pumps for food applications (CIP-Clean in Place) | 24 |
| 4.10 | Diaphragm break sensors and shut down in case of leaks | 24 |
| 4.11 | Pulsation damping..... | 24 |
| 4.12 | Downtimes | 24 |
| 4.13 | Taking out of service | 25 |
| 4.14 | Waste disposal after expiry of the expected service life..... | 25 |
| 5.0 | Maintenance | 26 |
| 5.1 | Inspection periods | 26 |
| 5.2 | Cleaning | 26 |
| 5.3 | Dismantling and assembling | 26 |
| 5.3.1 | Series DL, DP, DZ, DF, DB, DH-PT/TL..... | 26 |
| 5.3.1.1 | Replacement of diaphragms, valve seats and valve balls | 26 |
| 5.3.1.2 | Replacement of elastomer components | 27 |
| 5.3.1.3 | Replacement of PTFE diaphragm..... | 27 |
| 5.3.1.4 | Replacement of the internal control valve | 29 |
| 5.3.1.5 | Replacement of the external Q-valve..... | 30 |
| 5.3.1.6 | Replacement of the external DEPA AirSave valve (DL15/25/40) | 30 |
| 5.3.1.7 | Assembling and disassembling the pressure booster (DB series)..... | 31 |
| 5.3.2 | Series DH-FA | 31 |
| 5.3.2.1 | Replacement of elastomer components | 31 |
| 5.3.2.2 | Replacement of diaphragms, valve seats and valve balls | 32 |
| 5.3.2.3 | Disassembly of the control block..... | 32 |
| 5.3.2.4 | Replacement of internal valve | 32 |
| 5.3.2.5 | Replacement of the AirSave control valve (M-valve) | 33 |
| 5.4 | Assembling the pump..... | 33 |
| 5.4.1 | Assembling new clamp bands..... | 33 |
| 6.0 | Troubleshooting | 34 |
| 7.0 | Active pulsation damper | 36 |
| 7.1 | Principle of function..... | 36 |
| 7.2 | Recommended installation schematic..... | 36 |
| 7.3 | Pulsation damper with diaphragm breakage monitoring | 37 |
| 7.4 | Active pulsation damper with DEPA nopped E4 compound diaphragm | 37 |
| 8.0 | Spare parts | 38 |
| 8.1 | Spare parts storage..... | 38 |
| 8.2 | Ordering spare parts | 38 |
| 9.0 | Materials and pump coding | 39 |
| 9.1 | Appendix “pump weights in kg” | 40 |
| 10.0 | Devices for use in potentially explosive areas..... | 40 |
| 10.1 | Example | 40 |
| 10.2 | Classification of pump groups I and II | 40 |
| 10.3 | Surface temperature | 41 |
| 10.4 | Devices for use in explosion endangered areas Supplement for type approved pumps of category 1 | 42 |
| 11.0 | Tightening torques..... | 43 |
| | Note on Declaration of Harmlessness..... | 50 |

1.0 Introduction

The following instructions solely refer to DEPA Air Operated Diaphragm Pumps. Since the pumps are used in combination with other assemblies, such as solenoid valves, sensors or pulsation dampers, the valid operating instructions for these components and the associated notes on safety must also be taken into account.

These instructions contain information on safety, installation, operation, maintenance, repair and environmental waste disposal of the DEPA Air Operated Diaphragm Pump. Thoroughly read these instructions before use and always follow the information contained therein.

Persons entrusted with the installation, operation, maintenance or repair of the pump must have read and understood these instructions, especially the chapter on "Health and Safety". This applies in particular for those who are only occasionally involved in work on the pump, like cleaning or service personnel.

Each pump is subjected to stringent inspections and function tests before leaving the factory.

You should always bear in mind that a correct function, a long lifetime and optimal operational reliability of the pump mainly depend on

- correct installation
- correct commissioning
- and correctly performed maintenance and repair work.

Enquiries concerning service, spare parts or repairs should be addressed to the manufacturer or an authorized dealer.

Always provide the following information:

- Series
- Pump size
- Serial number of pump

This information is stamped on the identification plate on top of the pump.



Danger!

When returning pumps or pump parts to your supplier for repair or general overhaul, the delivery must be accompanied by certificates stating that pumps or pump parts are free of product and other aggressive or hazardous substances.

1.1 Warranty

The correct function of each DEPA Air Operated Diaphragm Pump is tested in the factory. The manufacturer or authorized dealer assumes warranty for the product as specified in the effective terms of sales and delivery. Faults resulting from the non-compliance with the aforementioned regulations and notes can only be rectified at the cost of the customer.

1.2 Transport, unpacking, storage

In order to avoid any problems you should

- check the delivered goods against the delivery note for completeness and correctness,.



Danger!

Consider the weight specified in paragraph 9.1 before attempting to lift the pump. Use only lifting gear of appropriate capacity. Do not step or stand under suspended loads.

- Fasten the lifting tackle so that the pump can be safely lifted.



Danger!
In order to avoid slipping of the sling the rope must be crossed over at the hook (Fig. 1).

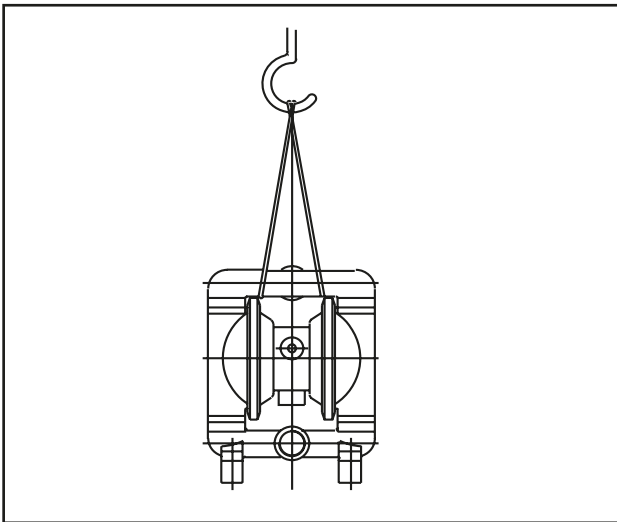


Fig. 1: Transport of pump

Be careful when unpacking the pump and proceed as follows:

- Check the packaging material for transport damage.
- Take the pump carefully out of the packaging material.
- Check the pump for visual damage.
- Remove the plugs from all pump ports.
- Check seals and fluid lines for damage.

The following points must be strictly observed when preparing the pump for storage:

- Store the pump in a dry place.

- Thoroughly clean used pumps before storage.

- Do not subject stored pumps to extreme temperature fluctuations.

1.3 Principle of function

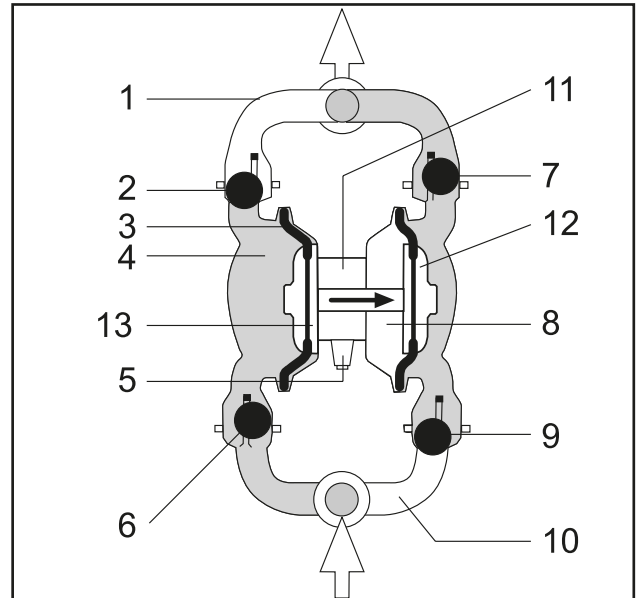


Fig. 2: Design of pump

- 1 Discharge manifold
- 2 Top valve ball
(closed during suction)
- 3 Diaphragm
- 4 Pump chamber
- 5 Silencer
- 6 Bottom valve ball
(opened. Medium flows into chamber)
- 7 Top valve ball
(open. Product is pressed out)
- 8 Air chamber
(the drive air displaces the medium via the diaphragm and at the same time pulls back the second diaphragm)
- 9 Bottom valve ball
(closed during delivery)
- 10 Suction socket
- 11 Air control unit
- 12 Outer piston
- 13 Inner piston

DEPA® Air Operated Diaphragm Pumps


1.3.1 Functionality

DEPA Air Operated Diaphragm Pumps are oscillating positive displacement pumps with two pump chambers arranged opposite each other. Both of these are separated by a diaphragm each into an air and a fluid section.


Both diaphragms are linked by a piston rod, so that with every stroke product is displaced to the outside from the one pump chamber and product is drawn into the opposite pump chamber.

The four drawings opposite describe the sequence of a complete cycle consisting of a suction and pressure stroke, an empty and a filled pump chamber.


In order to explain the function the product to be pumped was highlighted in colour.

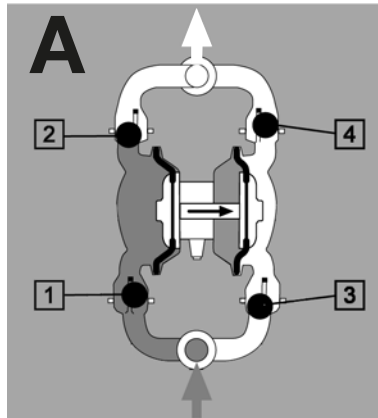


By filling the right hand air chamber (dark grey) the right hand diaphragm is pressed towards the outside. The piston rod thereby pulls the left hand diaphragm to initial position. Valve ball (1) is pulled out of its position, product (grey) flows into the left hand pump chamber. At the same time valve ball (2) is fixed in end position by the vacuum. The left hand pump chamber is thus completely filled with product (grey).

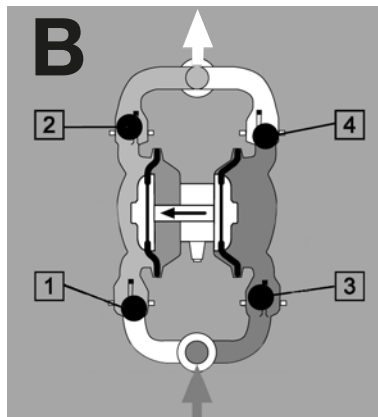

After switching of the control valve air flows into the left hand air chamber (dark grey), the right hand air chamber is vented. The suction process (see A) now takes place in the right hand pump chamber. Product (dark grey) is drawn in, product (light grey) in the left hand pump chamber is displaced to the outside. Valve ball (1) presses down, closes and valve ball (2) opens the flow path for product to the pressure outlet port.

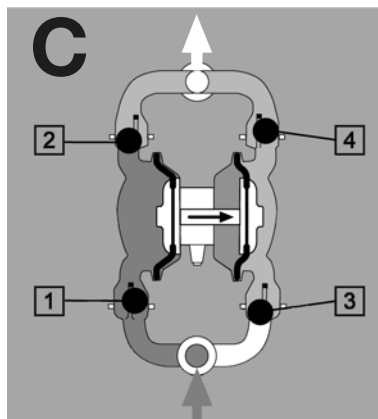

The suction process "A" is repeated with the only difference, that the right hand pump chamber is already filled with product (light grey). By switching of the control valve the right hand air chamber (dark grey) is filled, product (red) is drawn into the left hand pump chamber and the product from the right hand pump chamber (light grey) is displaced.

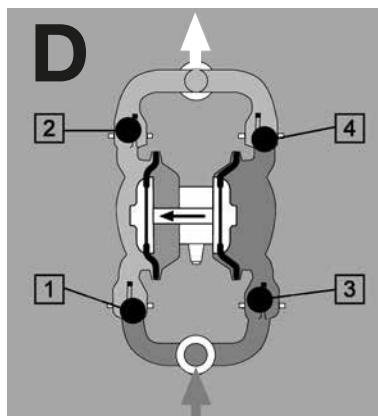

This sequence is repeated in reverse order as shown under C. The left hand air chamber (dark grey) fills up, vacuum draws product (dark grey) into the right hand pump chamber, while product (green) from the left hand pump chamber is displaced through the pressure port.

1.4 Technical data

1.4.1 Dimensions, weights and temperatures

See corresponding data sheet.



Danger!
For correct selection of the lifting gear you should multiply the specified weight with factor 1.5.

| Temperature range of the diaphragm material | |
|---|-----------------|
| DEPA nopped E4® compound diaphragm | -10° C – 130° C |
| NRS | -15° C – 70° C |
| EPDM (Norde®) | -25° C – 90° C |
| NBR (Buna N®) | -15° C – 90° C |
| FKM (Viton®) | -5° C – 120° C |
| DEPA® nopped S4 | -20° C – 110° C |

| Temperature range of the housing material | |
|---|-----------------|
| Stainless steel | -25° C – 130° C |
| Nodular cast iron | -10° C – 130° C |
| Aluminium | -10° C – 130° C |
| Polypropylene | 0° C – 60° C |
| PTFE | -20° C – 100° C |

Tab. 1. Temperature range of diaphragm and housing material

In case of short-term exceeding the max. permanent operating temperature you should consult the manufacturer.

When using PP control blocks the max. ambient temperature is 60° C.



Warning! For operation with auxiliary heating you should observe the temperature limit.

1.4.2 Control air

- DL 15-80 max. 7 bar
- DH max. 7 bar
- DB-pumps max. 7 bar
- DL..-SL, DL..-SU, DL..-UE, .DH..-UE with balls EPDM-grey max. 5 bar
- PD max. 7 bar

DEPA Air Operated Diaphragm Pumps are not subject to the pressure equipment directive acc. to article 1, para. 3.10, pressure equipment directive.

1.4.3 Air quality

Only air or inert gases of class 5 acc. to DIN ISO 8573-1 may be used as control air. (Class 5 corresponds with a max. particle size of 40µm; max. particle density 10mg/m³; max. pressure dew point +7°C; max. oil concentration 25 mg/m³).

Operating the pump with dry, non-lubricated and solids free compressed air prolongs the lifetime of the air control unit.



Warning!
Highly oil containing control air causes soiling of the control valve and swelling of the O-rings.

1.4.4 Particle sizes, suction heads

In order to ensure correct functioning of the pump the maximum product particle sizes listed in the following table must not be exceeded.

| | Pump sizes | | | | |
|--------------------------------|------------|-----|-----|-----|----|
| | 15 | 25 | 40 | 50 | 80 |
| Particle size (mm) | | | | | |
| Standard | 3,5 | 4 | 6 | 8 | 10 |
| DL-PM | 2,5 | 4 | 6 | - | - |
| SL/SU/UE - Version | 3,5 | 10 | 16 | 18 | 25 |
| DH-PT/-TL | 3,5 | 6,5 | 8 | - | - |
| max. suction head [mWs] | | | | | |
| Standard dry *) | 3,5 | 5,5 | 5,8 | 5,8 | 6 |
| Standard filled with product | 8,5 | 9 | 9 | 9 | 9 |
| DL-PM | 2,5 | 5,5 | 5,5 | - | - |
| DH-PT/-TL dry *) | 2 | 2 | 2 | - | - |
| DH-PT/-TL filled with product | 9 | 9 | 9 | - | - |

Tab. 2. Pump sizes.

*)Values are reduced when using PTFE diaphragms, seats and balls.

2.0 Safety

2.1 General information

These instructions were written for the operator and the maintenance and repair personnel. A well founded technical education and technical understanding is a major prerequisite. Persons lacking qualification have no permission to install, operate, service or repair the pump.

Installation, operation, maintenance and repair of the pump must in any case comply with the applicable national safety regulations and accident prevention instructions.

The following precautions must be applied before performing maintenance work.

If the product to be pumped is a hazardous or noxious substance, the system must be neutralized and vented. For this purpose the pump must strictly depressurized.

When cleaning the pump or its components you must make sure that all necessary precautions are in place.

Incorrectly installed, inattentively operated or insufficiently serviced pumps always are sources of potential dangers. The negligence of safety measures can cause severe personal injury or damage to the pump and connected units.

On pumps with protective covering and guards these must be properly assembled again before restarting.

In case of deficiencies adversely affecting the safety the pump must be shut down immediately and reliably secured against being switched on again. Only restart operation of the pump after all deficiencies have been rectified.

2.2 Danger sources

The pump works with pneumatic and hydraulic energies, which may be under high pressure.

Depending on its equipment, the pump may also work with electric energy.

Always relieve any pressure from the pump before starting work in the pneumatic or hydraulic system.

Always de-energize the pump before starting work in the electrical system.

Do not change any pressure settings to values higher than the ones specified in these instructions.

Safety facilities should not be removed or made ineffective.

2.3 Permitted operators

The pump must only be operated, serviced and repaired by authorised and trained persons. Persons under the influence of alcohol, medicine or drugs are not permitted to install, operate, service or repair this pump.

2.4 Intended use

The air operated diaphragm pump is a working machine specially designed for the transport of aggressive, abrasive and viscous fluids. Any other use is unintended and causes the immediate loss of warranty.

2.5 Unintended use

The operating safety and reliability of the pump can only be assured if it is used for the purpose it is intended for. The limits mentioned in the corresponding technical data sheets must not be exceeded under any circumstances.

2.6 Conversions and alterations to the pump

Conversions and alterations to the pump are strictly prohibited. Safety installations must not be made ineffective or changed or used in a way contradicting their purpose.

2.7 Symbols

The following symbols are used to highlight dangers and particular operating situations.



Danger!
warns of possible bodily injury or danger to life, if the corresponding instructions are not observed.



Warning!
warns of possible damage to the equipment.



Attention!
warns of dangerous electrical voltage.



Note:
provides useful hints for optimal and economical use of the product.



Environment:
Gives tips on how to handle the product in an environmentally friendly way.



Danger of explosion:
provides special information on how to handle explosive product or operation in explosive environments.



Danger!
Warning against caustic substances.

2.8 Maintenance and repair work

Maintenance and repair work must solely be carried out by qualified and specially instructed persons. This applies particularly for work on electric, hydraulic and pneumatic facilities as well as for the handling of hazardous fluids and substances.

Pumps used for the transport of harmful product must be decontaminated.

Keep unauthorized persons away from the pump.

Repairs in mechanical and electrical systems must only be carried out by the respective expert personnel. The professional execution of this work must be examined and approved by a highly skilled and responsible "Inspector".

The system must be shut down before starting any repair or maintenance work.

Before starting maintenance or repair work you should always check whether the pump has been depressurized and de-energized.

Secure the pump reliably against being switched on again, for this reason:

- Lock switch or shut.off element and remove the key,
- Attach a warning label to the pump.

The operator is solely responsible for compliance with the accident prevention instructions valid at the place of use.

As a measure to avoid injury all maintenance, adjustment and repair work should only be carried out using permissible and appropriate tools and working aids.

Moveable parts must be locked in place before starting work. It must be assured that these parts will not start to move while work is in progress.

2.9 Personal protective outfit

You should always wear protective clothing suitable for the job, in particular for cleaning, maintenance and repair. Depending on the type of work you should wear the following protective outfit:

- protective overall
- goggles or face mask
- ear defenders
- hard hat
- safety boots
- gloves

If there is a risk that your face may come into contact with chemicals, splinters or dust, you should wear a full face protection.



Danger!

During operation the pump may develop extreme heat. You should therefore switch off the pump and let it cool down before touching it. On DB high pressure pumps the booster can reach a temperature of >70° C.

2.10 Safety information for work on lines under pressure



Danger!
Take care when handling dangerous (caustic, harmful) fluids.

Always relieve the pressure before starting work on pressure lines, for this purpose

- Close shut-off valves
- Vent lines



Danger!

Be careful when checking for leaks on pressurized lines. Fluids or air escaping under pressure can penetrate clothes and skin and cause severe injury.

Be careful when loosening or changing pressure lines; lines mixed up by mistake may reverse the function.

Moveable parts must be moved to a safe home or parking position.

Always wear your personal protective outfit.

If a dangerous substance comes into contact with skin or eyes or if vapours of such a substance have been inhaled, you should immediately consult a medical service.

Do not touch pump or pipelines during operation. Danger of burning!



Environment:

Catch and dispose of chemicals and dangerous substances environmentally.

Do not expose the pump to extreme and sudden temperature fluctuations. This may cause the pump to start leaking. Retighten clamp bands or mounting flanges!

2.11 Safety during storage

Always observe the applicable regulations when storing or handing out chemicals.

2.12 Noise emissions (2003/10/EC)

In a room with several pumps you may experience an extreme development of noise. Depending on the sound pressure level the following measures must therefore be applied:

- below 70 dB (A): No special measures required.
- above 70 dB (A): Persons who are permanently in the room must wear ear defenders.
- above 85 dB (A): Room with dangerous noise level! Each door must have a clearly noticeable warning sign to warn persons from entering the room without ear defenders.

Measured mean sound pressure level L_p [dB(A)] acc. to DIN EN 29614-2 (ISO 9614-2) in 1m distance with a pump head of 60 m, pump DL50-FA-NNN, control air 7 bar, medium water, 20 °C = 66.8 dB(A). With a different pump rating and pump size or other application related conditions the mean sound pressure level may deviate.

2.13 Use of pumps in potentially explosive areas

The chapter "Equipotential bonding/earthing" and "Vibration distance" must be observed when assembling the pumps.

Earthing of pump and pulsation damper by means of earthing screw or discharging hoses must take place before bringing the pump into the potentially explosive area.

All connected pipelines, components and hoses must be electrically conductive (bleeder resistance <1 Mega Ohm Meter; surface resistance <1 Giga Ohm).

When using the pump in zone 0 the exhaust air from the pump must be discharged from

the explosion endangered environment through an electrically conductive pipeline or an electrically conductive hose.

Chapter 10.0 shows pumps for use in explosion endangered environments.

Chapter 10.2 shows the categorization of device groups I and II.

3.0 Installation

3.1 To be observed before installation

- 1 The installation must only be carried out by persons who have the necessary skills for this work (see chapter 2 "Safety").
- 2 Before installation align the pump correctly and fasten it without any tension. Pipelines must be assembled in a way that the basic weight of the lines is not resting on the pump.
- 3 In order to avoid damage to the pump new installations should generally be checked for any debris (welding beads, pieces of wire, etc.) in tank and pipeline system.
- 4 Consider the arrangement of the pump with respect to suction and discharge heads.
- 5 The pump system must be designed according to the requirements of the application. Valves or spools must be installed as close as possible to pressure port.

This also applies for T-fittings with valve

for bypass control or pressure relief valves, pressure gauges, flow control valves and shut-off valves.

- 6 Thoroughly examine the alignment of the pump with the pipelines, in order to avoid strain and premature wear.
- 7 Check all pipelines for leaks. This applies in particular for the suction line, in order to avoid the intake of air.
- 8 If the fluid to be pumped contains solid particles bigger than specified in table 3, a filter must be installed. The filter must be of such a size, that the change in resistance at the pump inlet port is only minor. This filter must be permanently monitored and, if necessary, cleaned.
- 9 Fluids which change their viscosity must be permanently agitated, or the tank must be fitted with a temperature sensor. With increasing viscosity start the agitator and/or the heating. This is of special importance for intermittent operation!
- 10 Retighten the clamps bands on pump and pulsation dampener before initial start-up. The torques specified in section 9.4 must be observed.

3.2 Design and arrangement of connecting lines

By experience, the cross section of the pipelines must be designed to allow a flow velocity of 1 to 3 m/s in the pressure line and 0.5 to 1.5 m/s in the suction line (see table: sizes of pump connections).

The cross-section of the compressed air supply must not be smaller than the connection on the pump.

For simple removal of the pump a shut-off element each must be installed in the suction and pressure sides.

- The weight of the pipeline must be taken up before the pump.
- Elongation compensators must be installed to compensate any elongation of the pipes caused by temperature increase.



Note:

It is recommended to install flexible, shape and pressure resistant hoses or compensators at the suction and pressure ports of the pump (Fig. 3). This will prevent the transfer of pulsation shocks into the pump.

3.3 Placement and possible installations of the pump

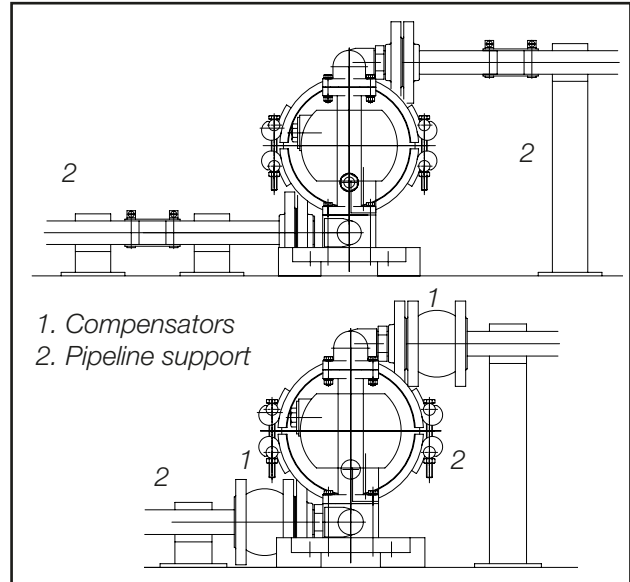


Fig. 3: Installation proposal for diaphragm pump

3.4 Foundations

Special foundations are not required. Each pump can be secured to the ground with dowels if appropriate.

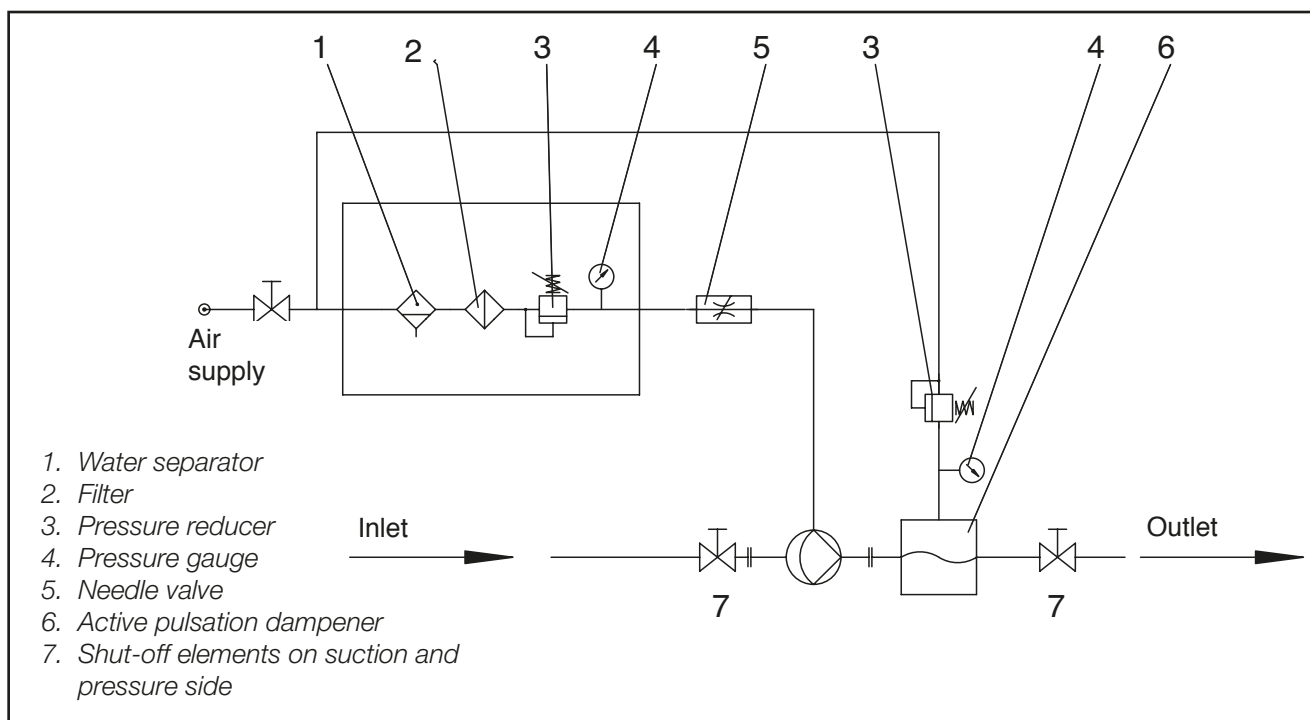


Fig. 4: Example of a pump installation

3.5 Connection of air supply line

We recommend to supply the air through a hose to the pump. Using moisturized compressed air requires the installation of a service unit with water separator. This control equipment can additionally be used to regulate the flow capacity of the pump. The diaphragm must not be subjected to shock loads. For this reason we recommend the installation of a spool, diaphragm or needle valve as shut-off element.



Warning!

Do not use a ball valve as shut-off element.



Note:

Especially for plastic pumps or pumps with PTFE diaphragms we highly recommend to install a slow start valve in the supply line to the pump. This valve protects both the diaphragm and housing parts against suddenly occurring pressure shocks

3.6 Connection of suction and pressure lines

Suction and pressure lines must be installed in a way that no additional loads are applied to the pump ports.

The tightening torque of the mounting screws and the pressure strength of the sockets and flanges must be observed with the installation of the suction and pressure lines. After assembly check the system for leaks.

3.7 Pump in suction operation

DEPA Air Operated Diaphragm Pumps are dry self-priming. Depending on the pump design a suction head of max. 9 m Wc can be reached, when the suction line is filled (table 2).

3.8 Pump in submerged operation

The DEPA Air Operated Diaphragm Pumps are suitable for submerged operation. However, it must be assured that the surrounding fluid will not attack the pump.

When installing the pump make sure that

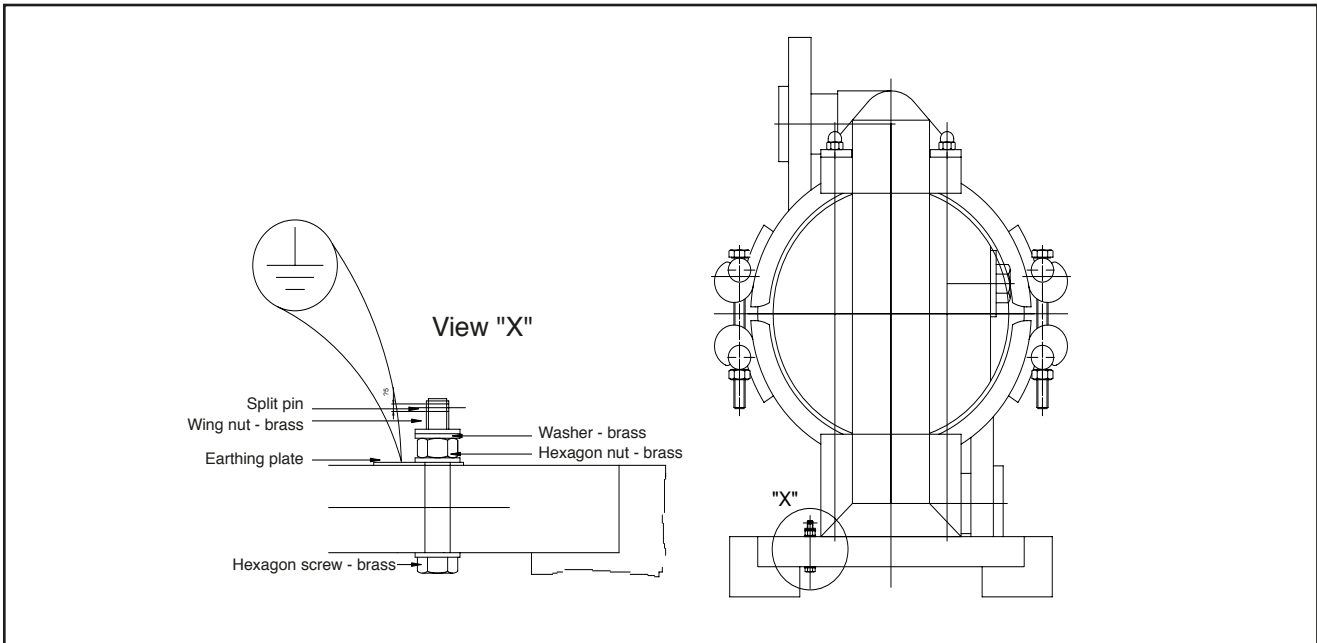


Fig. 5: Earthing screw

the air discharge muffler has been removed and the exhaust air is discharged from the fluid through a hose.

Not for DB high pressure pumps

3.9 Pump with pre-pressure

Avoid excessive feed on the suction side. This causes irregular running of the pump with extreme noise. The results are limited power and reduced lifetime of the pump. The maximum pre-pressure on the suction side must not exceed 0.7 bar.

3.10 Pump on drum

DEPA pumps of type DF can be directly mounted on drums or containers. For simple emptying mount the pump with an adapter on the container. Complete emptying of the container requires the use of a suction pipe with adapted length.

3.11 Equipotential bonding / earthing

In principle, pumps and accessories must be earthed or provided with equipotential bonding if there is the possibility of product specific electro-static charging and when

used in potentially explosive areas. Pumps and pulsation dampers with ATEX-approval are therefore fitted with an earthing screw (Fig. 5).

3.12 Vibration distance

When installing the pump ensure a sufficient distance (DL15 to DL40 of at least 5 cm; DL50 and DL80 of at least 10 cm) between pump and other components, except the connections.

3.13 Routing of exhaust air

The muffler permanently discharges relieved compressed air. This air can whirl up dust and thus generate an explosive atmosphere.

For pumps used in potentially explosive areas of category 1 discharging the waste air out of zone 0 is mandatory.

3.14 Installation instructions for incomplete machines (2006/42/EC, Append. VI)

For the installation of DEPA Air Operated Diaphragm Pumps without air control, Type DJ, the following conditions must be fulfilled so that the pump can be correctly assembled to other components to a complete machine, without affecting the health and safety of persons:

Valves provided by the customer has to be according to the following specification::

1. Air flow rate:: DJ15-40: 80Nm³/h (approx. 1350 NI/min)
2. Operating pressure: 1...7 bar
3. Function: 5/2-way valve, monostable, air-spring center position must be connected.

After the pump stops, the piston rod has no defined position.
4. Control: Suitable control signal for switching in due time (prevention of impermissible high loading of the diaphragm).

Stroke frequency max: DJ15: 2.5 Hz
DJ25/40: 2.0 Hz

5. Compressed Air Conditioning::

In accordance with the specifications from the valve manufacturer.

The applicable minimum requirements on the air quality, has to be in accordance with 1.4.3 of these operating instructions.

The following threaded connection are available on the pump:

DJ15: pipe thread EN 10226 R 1/4

DJ25/40: pipe thread EN 10226 R 3/8

The valve must be connected to the pump using a hose and pipelines PN10 (rated pressure 10 bar).

Using pumps in potentially explosive areas:

The instructions in 2.13 and 10.0 - 10.4 in it's present form of the operating manual have to be applied.

4.0 Operation

4.1 General

After correct connection of suction and pressure line as well as the compressed air supply the pump is ready for operation.



Warning!
Make sure that the diaphragm is not subjected to a pressure difference of more than 2 bar.

Do not expose the pump to sudden temperature fluctuations. This may cause the pump to start leaking.



Danger!
Do not touch pump or pipeline. Danger or burning!
Always wear your personal protective outfit when handling chemicals.



Environment:
Observe the applicable regulations for storage and hand-out of chemicals.

Dispose of chemicals according to legal regulations.

4.2 Switching on the pump



Warning!
The empty pump must never be immediately subjected to high pressure.

For automatic switching of the pump by means of a solenoid valve we recommend the upstream installation of a slow start valve.

The pump will start to deliver immediately after opening the air flow.

4.3 Flow control

The pump flow can be regulated via the fed air pressure and the air quantity. We recommend an air flow dependent regulation, in order to rule out fluctuations in pumping pressure. The air pressure must in this case be considerably higher than the pumping pressure. It is recommended to run the pump with a stroke frequency as low as possible, in order to save wear items, e.g. diaphragms, ball valves and air control valve and to protect the environment.

4.4 Switching off the pump

To shut-off the pump reduce the air flow to the pump by means of the valve. The pump will stop immediately.



Warning!
If the pumped product is of aggressive nature the pump must be thoroughly flushed or cleaned after use.

Observe the notes on cleaning.

4.5 What to do in events of emergency

In an event of emergency the pump must be switched off immediately.

4.6 Remote operation indicator

Operation of the pump can be electronically monitored by means of a remote operation indicator.

4.7 Diaphragm monitoring - conductive

With a defective diaphragm product will enter into the air chamber, where it is detected by the integrated sensor. When pumping conductive product the conductivity measurement will measure a current flow between both electrodes.

The evaluation unit supplies the sensor with voltage and from a certain amperage (<1mA) it switches a relay, which in turn switches the pump off or triggers an alarm signal.



Note:
The product must have a minimum conductivity value of $>5\mu\text{S}$.

4.8 Diaphragm monitoring - capacitive

When pumping non-conductive product diaphragm monitoring requires the use of a capacitive sensor system.

4.9 Cleaning pumps for food applications (CIP = Clean In Place)

The pumps can be cleaned manually after dismantling or in place (CIP). Consult the pump supplier for special application related cleaning procedures.

Here an example for CIP-cleaning:

- To clean the inside, the pump must be flushed with cold water during operation.
- Flush with approx. 2.5% caustic soda solution at 70 - 80°C for approx. 20 - 30 minutes.
- Finally flush again with cold, clear water.



Warning!
During all CIP cleaning processes the DEPA® Air Operated Diaphragm Pump must be running. Otherwise the diaphragm may be excessively stretched and prematurely damaged.



Warning!
Reassemble clamp bands or mounting flanges after cleaning, retighten if necessary!

4.10 Diaphragm break sensors and shut-down in the event of leaks

When using diaphragm break sensors, the air supply may be interrupted if there is a leak. For electrical connections please refer to the wiring diagram on page 26 (Fig. 8).

4.11 Pulsation damping

Air operated diaphragm pumps are double-acting, oscillating pumps and thus generate a pulsating flow. For minimizing this pulsation we recommend the use of pulsation dampeners. There are various designs available, active and passive, made of metal or plastic, with and without diaphragms and in several different sizes. Depending on the prevailing pressure conditions they must be manually or automatically adjusted in-situ.

4.12 Downtimes

After pumping product with solids, chemicals or oils the pump chambers must be thoroughly flushed before shutting down. This prevents the settlement of solids or chemical attacks and thus the destruction of the diaphragms when restarting.

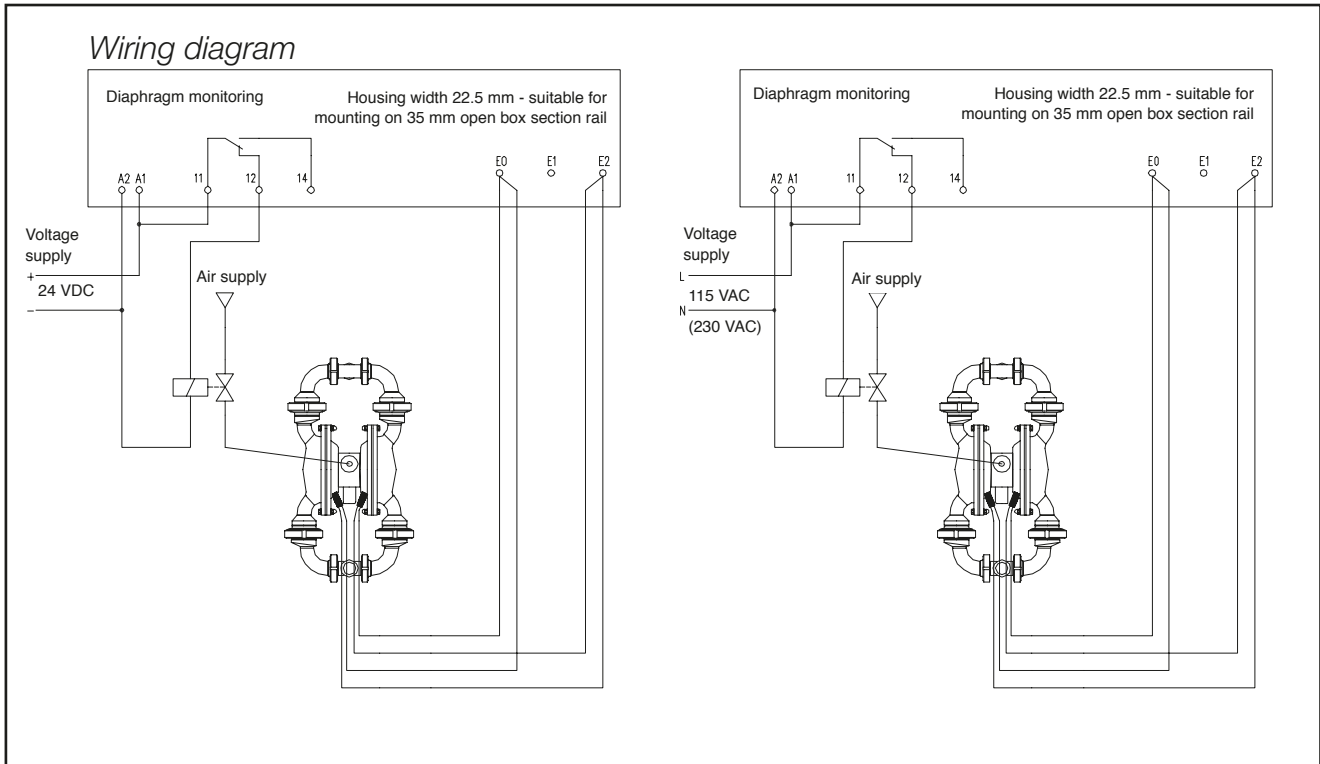


Fig. 8: Wiring diagram leakage sensors

4.13 Taking out of service

The pump stops when cutting off the air supply. Since the valve balls in suction and pressure sides act as non-return valves, the rising part of the pressure line will always remain filled with product. When disassembling the pump care must be taken, as the pump may still be filled with product. The pump itself can be partly emptied through the plugs on the sides of the pump (optional).

4.14 Waste disposal after expiry of the expected service life



The metal components used, such as aluminium, grey cast iron, high-grade steel and steel can be returned for recycling. Plastic parts cannot be reused and must be disposed of as refuse.

5.0 Maintenance

5.1 Inspection periods

- Visual inspection every week.
- Depending on type and/or duration of use disassembly and renewal of wear items every 4 weeks to 6 months.
- Since PTFE deforms under pressure, the following pumps must be checked for leakage at regular intervals and the screw connections must be retightened as necessary:

| Type | Inspections interval | Srew joint |
|-----------------------------|----------------------|----------------------------|
| PM with PTFE Valve seats | weekly | Annchor rod, Clamp band |
| DL-PT/-TL | monthly | Annchor rod, Clamp band |
| DH-PT/-TL | monthly | Socket / Pump chamber |

Tightening torques see page 42.

5.2 Cleaning



Danger!
Always observe the notes on safety in chapter 2 “Safety”.

Check all lines and fittings regularly for leaks and externally visible damage! Repair any damage immediately!



Danger!
Before working with the pump, the pump must be moved from a possible ATEX area to a work area.

No work on the pumps in the ATEX area!



If the pump is used for aggressive, caustic or toxic product, the pump must generally be flushed with a neutral agent before opening the pump housing.



Always wear protective clothing when working with solvents and/or cleansing agents.



Pumps for use in explosion hazard areas must always be kept clean of dust deposits.

The following is generally valid:

The pump should preferably be cleaned mechanically instead of using chemical means. When using chemical cleansers, the compatibility with the pumped product must be assured..

5.3 Dismantling and assembling



Danger! Before disassembly the pump must be disconnected from the compressed air supply and removed from the system.

General

In case of damage on the pump you may perform the following work to replace the damaged assemblies and parts. Please bear in mind that the manufacturer or the authorized dealer will only accept possible warranty claims if the pump is returned without being opened.



Note: For repairs use only genuine DEPA spare parts, as otherwise the warranty will become null and void.

5.3.1 Series DL, DP, DZ, DF, DB, DH-PT/TL

5.3.1.1 Replacement of diaphragms, valve seats and valve balls

Depending on the application, air operated diaphragm pumps can be delivered with various elastomer materials. The following materials are available:

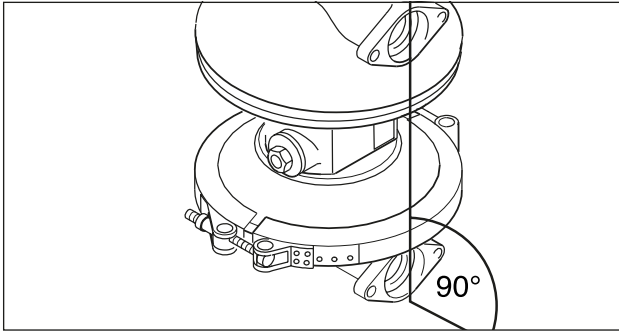


Fig. 17: Alignment of pump chambers

| | | |
|-----------------|--------------------------|-----------------------|
| NRS | | marked yellow |
| NBR | (Buna N®) | marked red |
| EPDM | (Nordel®) | marked blue |
| EPDM-grey | | no identifying colour |
| FKM | (Viton®) | marked white |
| PTFE | (Polytetrafluorethylene) | no identification |
| DEPA nopped E4® | | no identification |
| DEPA® nopped S4 | | no identification |

The specified colour marks only apply for valve balls and valve seats. The diaphragms are marked by corresponding characters.

Before installing a new set of diaphragms, valve seats and valve balls make sure that the available material is suitable for the intended use (see compatibility list).

If the defective parts in the pump have not been damaged by normal mechanical wear, but show signs of chemical attack, you should use a different material.

5.3.1.2 Replacement of elastomer components

- Loosen the screws and disassemble pressure and suction sockets (Fig. 9).
- Loosen the ball lifter (optional accessory)
- Loosen the clamp bands (to avoid sizing of high-grade steel nuts and bolts, if necessary apply some oil) (Fig. 10).

On the polished high-grade steel versions (DB, DH) unscrew the milk pipe fitting.

- Remove the pump chambers.
- Loosen the outer diaphragm plate and take it off with the diaphragm (Fig. 11).
On plastic pumps turn on the plastic cap first (from DL25).
- With compound diaphragms, the diaphragm is unscrewed by hand directly out of the plunger.
- Pull the piston rod with the second diaphragm out of the central block and disassemble the second diaphragm as described before (Fig. 12).

5.3.1.3 Replacement of the PTFE diaphragm

Proceed as follows to replace PTFE diaphragms:

- Pumps DL 40, 50 and 80 with PTFE diaphragms have internal diaphragm plates with bolted on shims to reduce and displace the stroke. For later changeover to PTFE diaphragm the corresponding plates must be used (Fig. 14).
- PTFE diaphragms are generally delivered with a EPDM back diaphragm. This must be mounted on the air side.
- Assembly of the pump chamber: Assembly of diaphragm, fixation by fastening the outer diaphragm plate acc. to page 42 ff "Tightening torques". The pump chambers must generally be assembled with the diaphragm in suction position (Press diaphragm plate into air chamber) (Fig. 16). Fasten clamp band or mounting flange. Assemble the second diaphragm in the same way. The flange face of the pump housing must be in line (Fig. 17).
- Assembly of PTFE valve seats:

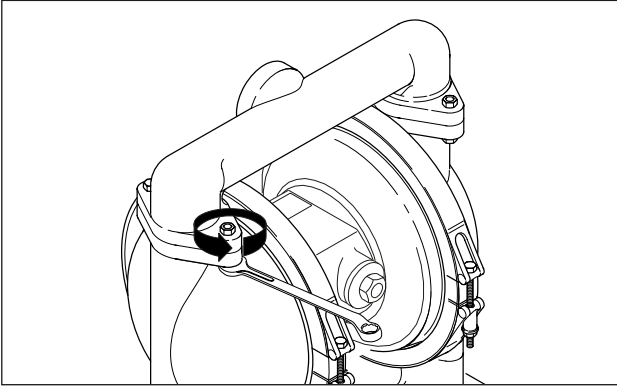


Fig. 9: Removing suction and pressure ports.

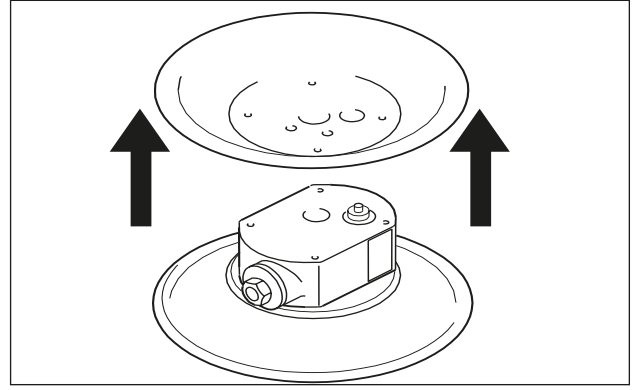


Fig. 13: Disassembling the air chambers

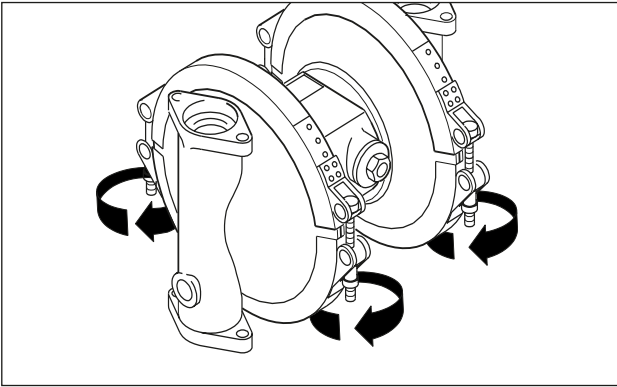


Fig. 10: Opening the clamp bands.

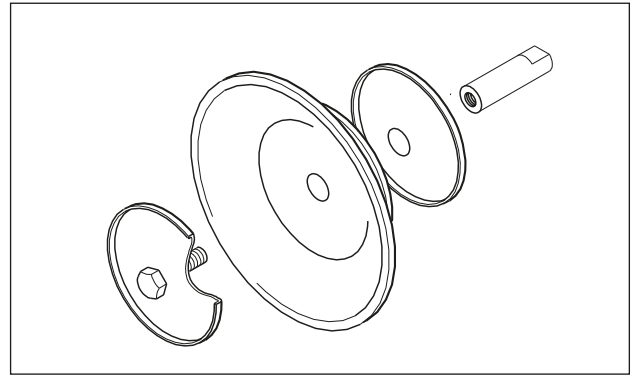


Fig. 14: Assembly of standard diaphragm with inner and outer plate

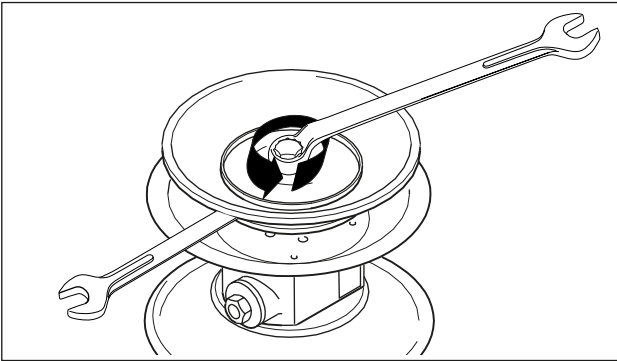


Fig. 11: Loosen the diaphragm plate. (not used for DEPA E4® compound diaphragm.)

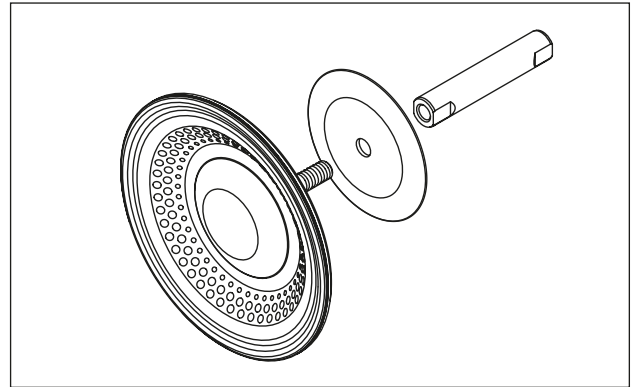


Fig. 15: Assembly DEPA E4® compound diaphragm

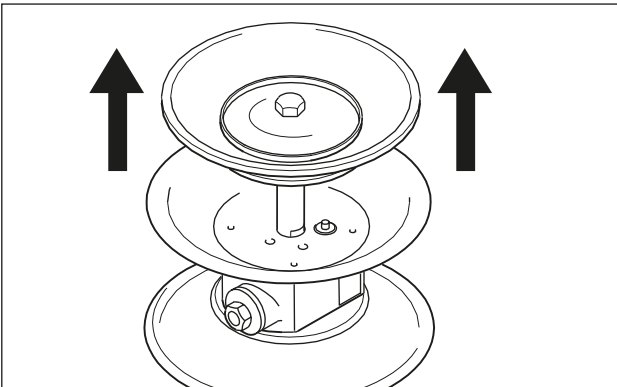


Fig. 12: Pulling out the piston rod.

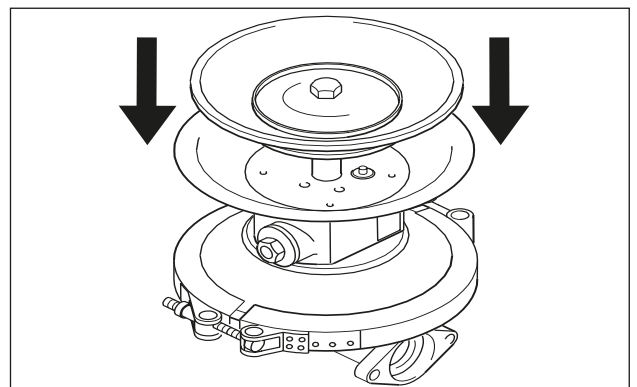


Fig. 16: Assembly of second pump chamber

DEPA® Air Operated Diaphragm Pumps

PTFE valve seats (except series PM and DL15-FA/SA) are generally delivered with 2 O-rings. In order to guarantee leak tightness of the pump these O-rings must be replaced after each disassembly of the inlet and outlet ports.

Valve seats for series PM (only one O-ring or no O-ring) must be completely replaced after each disassembly of the ports.

On plastic pumps from DL25 the O-rings in the outer diaphragm plate must be replaced after each disassembly.

- Assemble the ball lifter (optional accessory), install a pressure-side valve seat in the ball lifter
- Assemble new valve balls.
- Tighten the fastening screws for suction and pressure ports with the correct torque.
- Pumps of series DH-PT/-TL are generally equipped with DEPA nopped E4® compound diaphragms. Installation of the diaphragm takes place by means of indexing disc and set screw, without the diaphragm plate: After the set screw is threaded, the diaphragm is to be screwed onto the plunger and tightened by hand.

5.3.1.4 Replacement of the internal control valve

- Procedure as described under 5.3.1.
- Unscrew the air chambers from the central block (only on metal pumps, exception: DB diaphragm pumps, DH) (Fig. 13).
- Press the air control valve out of the central block.
- The air control valve is replaced as a complete unit (Fig. 18).
- For assembly of plain bearing bushings

and seal ring it is recommended to use the piston rod for guidance. Take care to assemble the plain bearing bushings with the slits offset to each other (Fig. 19).

- In contrast to the assembly instructions for bearing bushings of pump series DL25 - DL80, which are fitted with two bearing bushings, the procedure for pump size DL15 with kits single bearing bushing is slightly different.

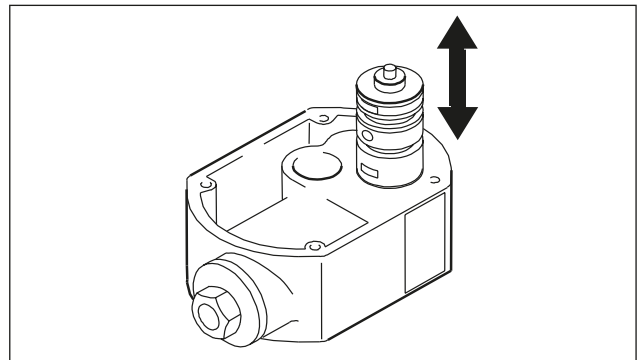


Fig. 18: Assembly of internal control valve

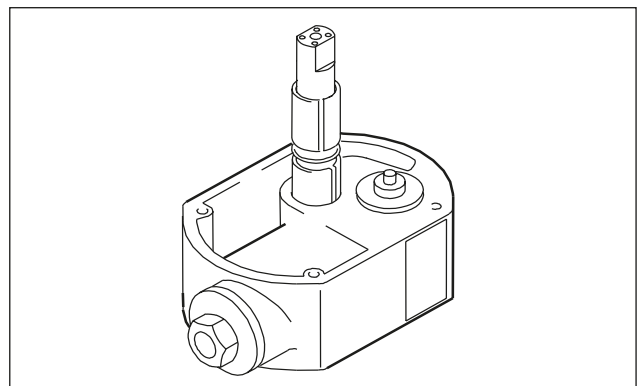


Fig. 19: Assembly of piston rod

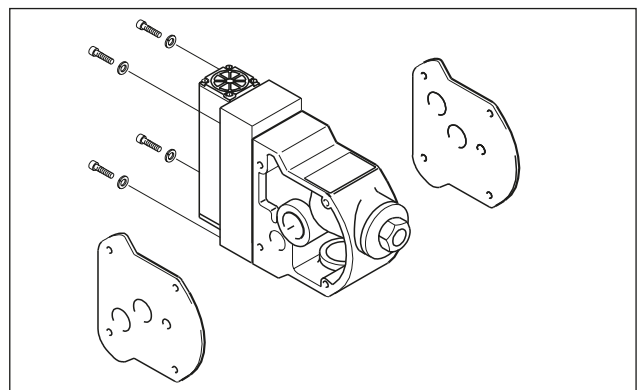


Fig. 20: Assembly of external control valve

The bearing bushing has two grooves to take up the outer O-rings. In order to prevent the O-rings being damaged by the recess in the bore the O-rings must not be pushed past the recess. For this purpose an O-ring is pushed over the bushing, the bushing is then inserted into the bore with the side without O-ring and pressed in until the groove becomes visible on the opposite side. Now the second O-ring is placed into the groove and the complete bushing is pressed flush into the bore.

The piston rod is only delivered completely assembled with shell and O-rings.

Replacement of the shell rings is not possible for technical reasons.

5.3.1.5 Replacement of the external Q-control valve

- Loosen four fastening screws on the control block. Now you can pull out the complete control valve with pilot control. This is also possible without disassembling the pump (Fig. 20).


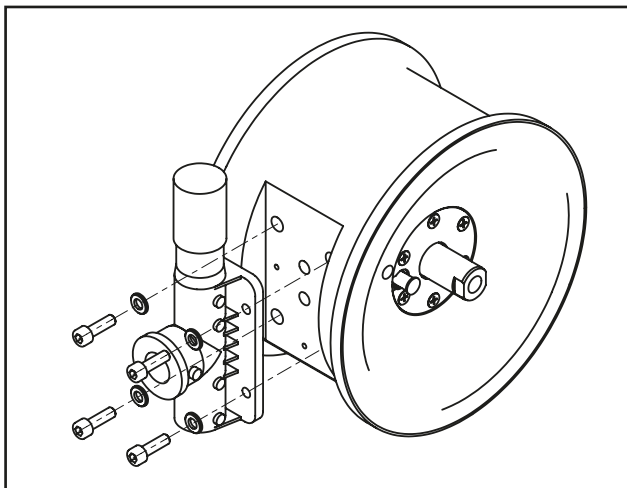


Fig. 21: DEPA AirSave System (DL15/25/40)

5.3.1.6 Replacement of the outside DEPA AirSave System (DL15/25/40)

- Loosen four mounting screws on the control block. Now you can detach the complete control valve from the control block. This is also possible without disassembling the pump first! (Fig. 21).

5.3.1.7 Assembling and disassembling the pressure booster (DB series)

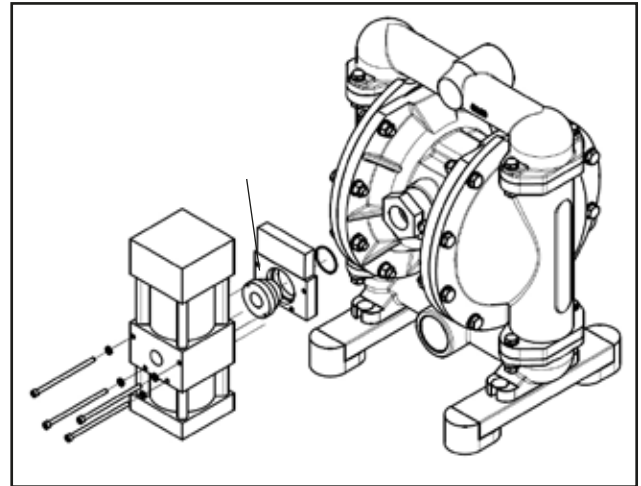

Assembly:

- First, connect plate (C) with threaded socket (A) to pump. Special tool is required for (A).
- Mount the pressure booster (B) to the plate (C) using the 4 cheese head screws.

Disassembly:

- Loosen the cheese head screws
- Loosen the pressure booster (B)
- Loosen the threaded socket A and plate C

5.3.2 Series DH-FA

5.3.2.1 Replacement of elastomer components

See information provided under 5.3.1.1.

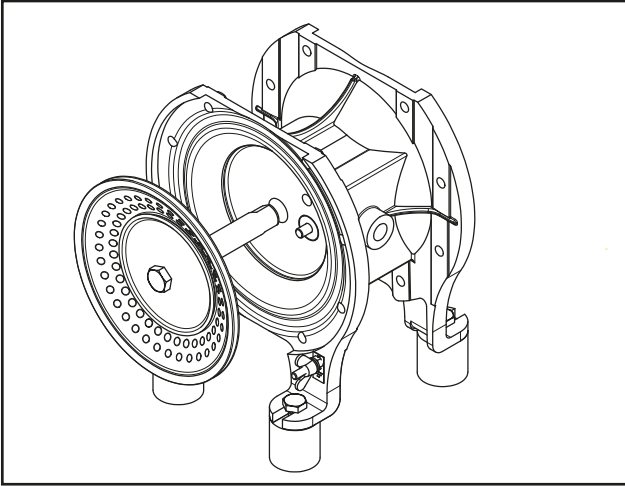


Fig. 22: Pulling out the diaphragm with piston rod

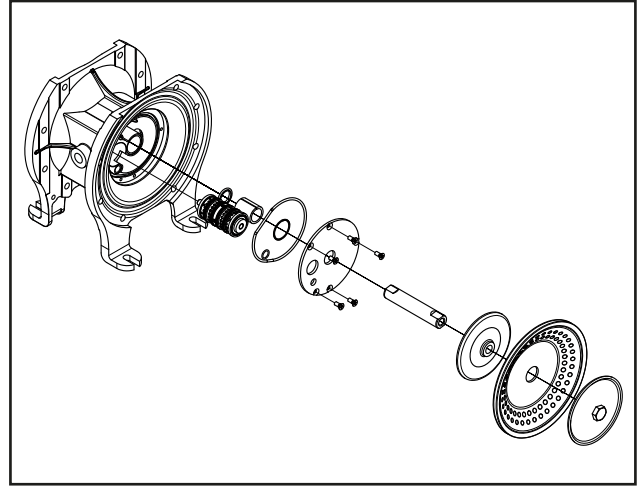


Fig. 23: DH pump with interior control valve

5.3.2.2 Replacement of diaphragms, valve seats and valve balls

- Loosen screws on the suction / pressure socket
- Loosen the ball lifter (optional accessory)
- Remove the pressure-sided valve balls and valve seats
- Remove the suction-sided valve seats and valve balls
- Disassemble the pump chambers
- Loosen the outer diaphragm plate and remove with the diaphragm (Fig. 11 + Fig. 22).

With Compound membranes, the membrane is unscrewed by hand directly out of the piston rod.

- Pull the piston rod with the second diaphragm out of the central block and disassemble the second diaphragm (Fig. 12).
- The installation of the new diaphragm, valve seats and valve balls is done in reverse order of the above

Information for the material can be found in Section 5.3.1.1

We recommend removing and inspecting the air control, if the product reach the air area (see 5.3.2.3).

5.3.2.3 Disassembly of the control block

- Loosen the suction-/discharge manifolds and pump chambers
- Loosen diaphragm, see Fig.11 + 12
- Disassemble the control valve and seal
- Disassemble the muffler
- Loosen the control block cover and remove the seal
- Push control valve out (interior valve)
- Push out the switch cartridge (Pilot control) (on pumps with AirSave valve)
- Push out the bearing bush and the jacket ring
- The assembly is done in reverse order from the above

5.3.2.4 Replacement of internal valve

- as described under 5.3.2.3.
- Insert control valve as complete unit

5.3.2.5 Replacement of the AirSave control valve (M-valve)

- Remove AirSave valve and seal
- Loosen the control block cover and remove the seal
- Push out the switch cartridge (Pilot control) out

The switch cartridge and the AirSave control valve require replacement as a complete unit.

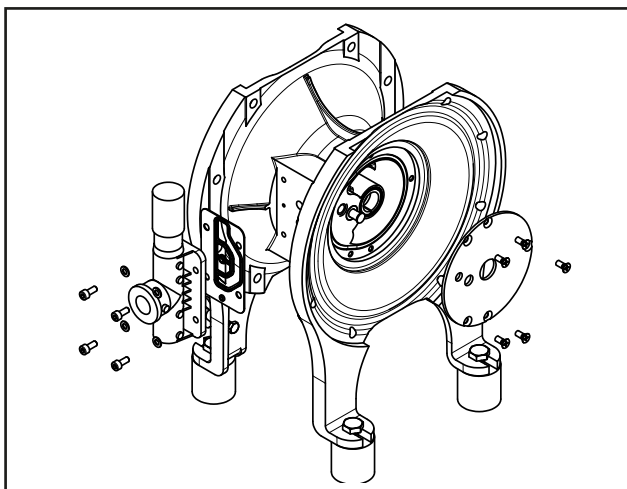


Fig. 24: DH pump with AirSave control valve

5.4 Assembling the pump

The arrangement of parts can be seen in the exploded view.

- Assemble the gasket so that the air supply bore remains open (applies also for assembly of the air chambers).
- Check air filter and muffler for clogging, replace if necessary.
- During installation, the corresponding tightening torques must be observed on page 42 ff.

5.4.1 Assembling new clamp bands (DL, DP, DZ, DF)

- Assemble the new clamp bands and pre-tension these with the clamping bolts.

- Knock the clamp bands lightly with a plastic hammer onto the pump chamber for easier settling.
- Once the clamp bands have settled tighten the clamping bolts.



Danger!
Retighten the clamp bands after 5 operating hours.

6.0 Troubleshooting

| Fault | Possible cause | Remedy |
|--|--|---|
| Pump running, no delivery | Pump draws in air Suction valve closed Suction capacity exceeded Valve ball and seat on suction side worn | Seal the suction line Open valves Change the arrangement Replace seats and balls |
| Insufficient pumping capacity | Muffler clogged Air inlet filter clogged Insufficient air supply Pipelines blocked Viscosity too high | Clean or renew Clean or renew Check supply line Clean Change conditions |
| Pump slows down, stops, restarts | Icing of the control valve | Use dry air Supply the air with anti-freeze Use a heavy-duty muffler |
| Reduced flow, stronger pulsation | Valve ball on suction side blocked | Ensure movability of valve ball |
| Product from muffler | Diaphragm cracked | Replace diaphragm |
| Air in product | Diaphragm cracked | Replace diaphragm |
| After filling the line pump standstill | Air pressure too low To high viscosity Viscosity too hig | Increase air pressure |

DEPA® Air Operated Diaphragm Pumps

| Fault | Possible cause | Remedy |
|---|---|---|
| Pump does not work despite air supply | Muffler clogged | Clean or renew |
| | Air inlet filter clogged | Clean or renew |
| | Valve balls sticking to valve seat | Loosen, use PTFE balls instead |
| Valve balls deformed | Chemical attack Mechanical attack | Change material Change material |
| Pump leaking at the clamp band | Clamp band cracked | Replace |
| | Diaphragm not centred during assembly | Assemble again |
| PTFE diaphragm cracked a after short time | Large solids in product | Install a filter |
| | Compressed air opened with a shock | Install a slow start valve |
| Insufficient suction head | Valve ball and seat leaking | Replace |
| | Pump completely dry | Fill suction line |
| Pump very loud, crackling noise | Control valve worn | Replace |
| | Excessive feed on the suction side | Install heavier valve balls Throttling of suction line |
| Piston rod hard moving | Compressed air too dry (Instrument air) | Lubricate the air |
| | Temperature too high | Cool down |
| | Compressed air dirty | Install a filter |
| | Piston rod run in | Replace |

7.0 Active pulsation damper

7.1 Function

The active pulsation dampers are designed for in-line installation. The pressure peaks of the flowing product raise the diaphragm and compromise the air cushion in the air chamber.

When the displacement pressure in the pipeline drops, the diaphragm is pressed down by the compressed air cushion which keeps the pressure in the pipeline virtually constant.


The pressure in the air chamber automatically adjusts as a result of the internal air control if the pressure in the pipeline is increased due to system conditions.

Any extra pressure needed is supplied by the air port; excess pressure escapes through the muffler.

We recommend installing the pulsation damper directly on the discharge manifold of the pump.

7.2 Recommended installation schematic

Pulsation dampers can be mounted in any position, as long as there are not intentions to install diaphragm breakage monitoring.

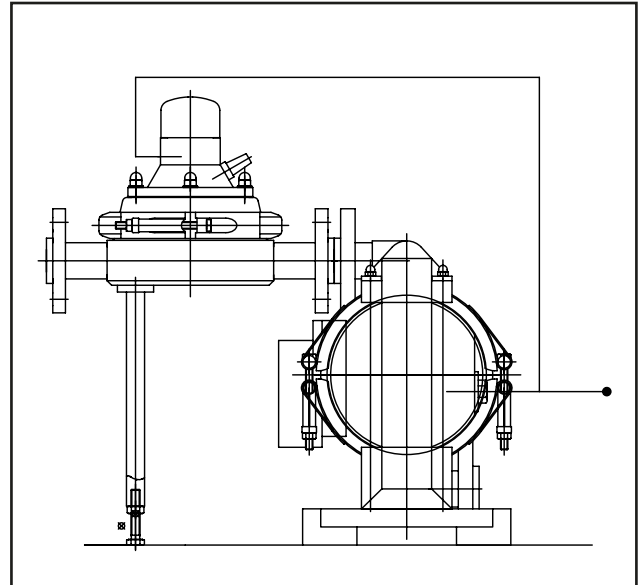


Sketch 1

The air supply connection must always be independent from the pump, so that the air pressure for the pulsation damper can be adjusted separately.


To achieve an optimal degree of damping of the active pulsation damper the operating air pressure must be determined through trials. As starting value the pressure is set 0.5 bar lower than the delivery pressure of the pump. The optimal degree of damping can subsequently be determined by regulating up or down in 0.1 bar increments.

Attention: If the operating conditions such as delivery pressure or product viscosity

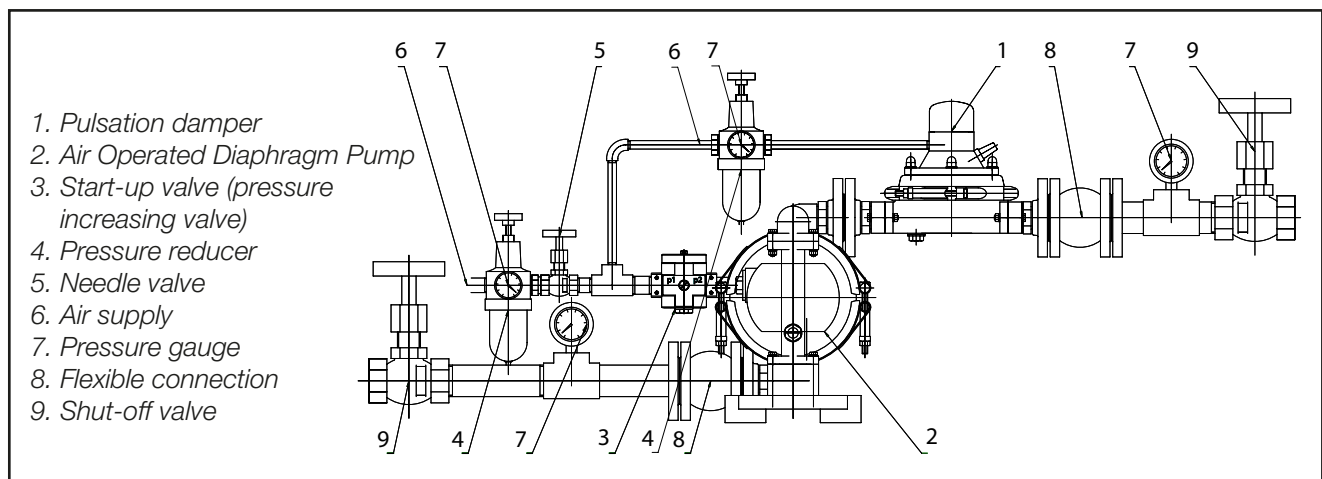


Sketch 2

change, the driving pressure of the pulsation damper may need to be adjusted.

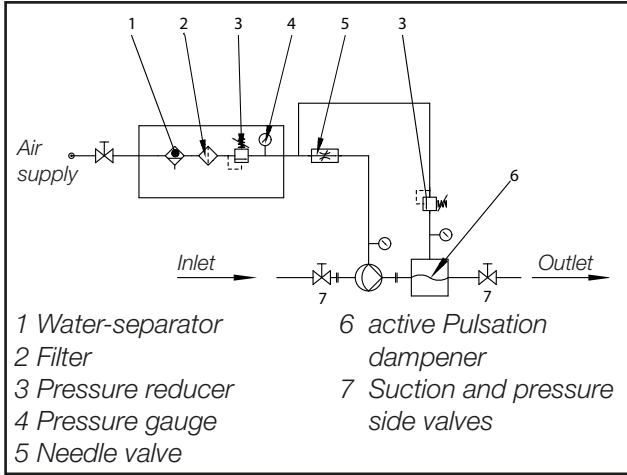

Sketch 3

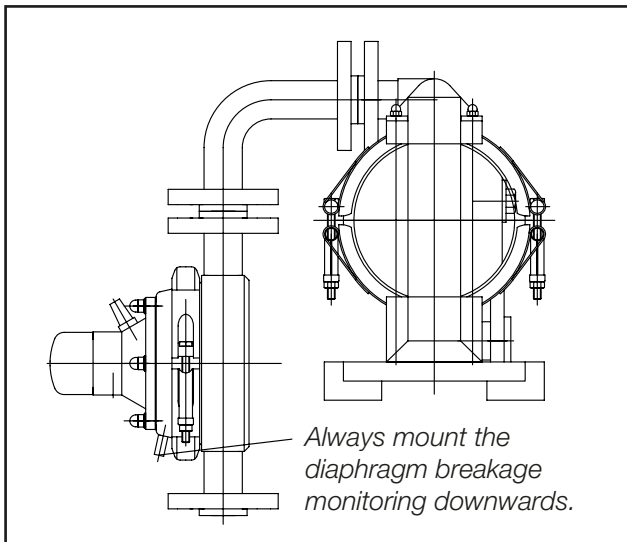

Sketch 4

One must always make sure that the weight of the pulsation damper is supported as shown in sketch 1 and any load is taken off the pump connection.

If the pulsation damper is directly mounted to the pressure socket of the pump, a flexible connection (e.g. compensator) should be considered to connect to the onwards pipeline.

7.3 Pulsation damper with diaphragm breakage monitoring

Pulsation dampers equipped with a diaphragm monitoring system in the air chamber must not be installed horizontally, they must be vertically installed as otherwise the function of the diaphragm monitoring system is not assured (see sketch 4).

7.4 Active pulsation damper with DEPA nopped E4 compound diaphragm

The DEPA nopped E4® compound diaphragm can also be installed in all active DEPA pulsation dampers.

The same requirements as outlined in section 5.3.3 (page 29 and Fig. 14, page 28) apply. However, it should be noted that different setscrews must be used for the pulsation damper (see table below). In the case of PD50/80, in contrast to the pump the switching disc is installed 180° rotated (counterbore points towards the diaphragms).

| Pump size | Assembly | Item No. Setscrew | Dimensions |
|-----------|---------------|-------------------|------------|
| PD15 | 151801-89BGPD | 910003611 | M5 x 20 |
| PD25 | 251801-89BGPD | 910003311 | M12 x 25 |
| PD40 | 401801-89BGPD | | |
| PD50 | 501801-89BGPD | 910003711 | M12 x 50 |
| PD80 | 801801-89BGPD | 910003511 | M20 x 55 |

8.0 Spare Parts

8.1 Spare parts storage

Since the extent of the recommended spare parts storage depends on the period of use and the different operating conditions for the pumps, you should consult the manufacturer or an authorized dealer.

8.2 Ordering spare parts

Please state the following when ordering spare parts:

- Pump type
- Construction year and serial number
- Spare parts article number

Should subsequent material changes for different parts of the pump have taken place, this information is mandatory. The required spare parts and their article numbers can be found in the spare parts lists. These can be found under www.cranechempharma.com.

Liability when using non-genuine spare parts:

The installation and/or use of non-genuine spare parts or accessories can have a negative effect on design features of the air operated diaphragm pump and thus adversely affect its operation. For damage caused by the use of non-genuine spare parts and accessories on pump, system or product all liability and warranty is excluded.

9.0 Materials and pump coding

| Series | |
|---|----|
| Standard series made of cast metal, plastic and stainless steel, polished | DL |
| Cast metal, non metallic (flanged design) | DH |
| Drum pump | DF |
| Double pump | DZ |
| Powder pump | DP |
| High pressure pump | DB |
| Special pump without own control valve | DJ |

DL 40 - PP - E E E

| Pump size | | | |
|-------------|---------|-------|----|
| Connections | G1/2" | DN 15 | 15 |
| Connections | G1" | DN 25 | 25 |
| Connections | G1 1/2" | DN 40 | 40 |
| Connections | G2" | DN 50 | 50 |
| Connections | G3" | DN 80 | 80 |

| Max. pressure range | |
|--|---|
| All types as specified DB pumps to 21 bar | - |
| DB pumps to 16 bar | B |
| DB pumps to 13 bar | A |

| Material assembly groups | | | |
|---|--|-------------------------------|------------------|
| Housing | Diaphragm plate | Centre block | |
| Cast aluminium | High-grade steel | Cast aluminium | FA |
| Nodular cast iron*** | Steel | Cast aluminium | CA |
| Nodular cast iron*** | Steel | Cast bronze*** | CX |
| Cast high-grade steel | stainless steel | Cast aluminium | SA |
| Cast high-grade steel*** | Stainless steel | Cast aluminium | SF |
| Cast high-grade steel*** | Stainless steel | Cast bronze | SX |
| Cast high-grade steel | Stainless steel | Stainless steel | SS |
| High grade steel polished 1.4301 (AISI/BS 304) | Polished stainless steel 1.4301 (AISI/BS 304) | Cast aluminium nickel-plated | SL |
| High grade steel polished AISI/BS 316L (1.4404) | Polished stainless steel AISI/BS 316L (1.4404) | Cast aluminium nickel -plated | UL/ SU/ UE |
| PP* | PP* | PP* | PP |
| PP injection moulded**** | PP* | PP* | PM |
| PP* electr. conductive | PP* electr. conductive | PP* electr. conductive | PL |
| PTFE** | PTFE** | PP* | PT |
| PTFE** electr. conductive | PTFE** electr. conductive | PP* electr. conductive | TL |

| Interior equipment | Diaphragm | Seats | Balls |
|--|-----------|-------|-------|
| NRS | B | B | B*** |
| NBR (Buna N®) | N | N | N*** |
| EPDM (Nordel®) | E | E | E*** |
| EPDM (grey) | G | G | G*** |
| FKM (Viton®) | F | F | - |
| PTFE (Teflon®)** | T | T | T |
| EPDM grey for series DH (polished stainless steel pumps) | U | - | - |
| PTFE ** for series DH | P | - | - |
| DEPA nopped E4® compound diaphragms | Z | - | - |
| Stainless steel | - | R | R |
| Stainless steel DB | - | H | R*** |
| NBR, steel core*** | - | - | Y*** |
| EPDM, steel core*** | - | - | W*** |
| EPDM, grau with steel core*** | - | - | X*** |
| PTFE**, steel core*** | - | - | Z*** |
| NRS, steel core*** | - | - | V*** |
| Hytre® | H | - | - |
| DEPA® nopped S4 | S | - | - |

* Polypropylene solid
 ** Polytetrafluoroethylene
 *** not for DL 15
 **** PP-injection molding, only size 15/25/40

DEPA® Air Operated Diaphragm Pumps

9.1 Pump weights in kg (for combinations with stainless steel seats or balls with core increase the weight of the pump)


| Pump size | FA | DH-FA | CA | CX | SA/SF | SX | PM | PP/PL | PT/TL | DL-SL/SU/UE | DH-UE | DB |
|-----------|-----|-------|-----|-----|-------|-----|-----|-------|-------|-------------|-------|----|
| 15 | 3,5 | 2 | - | - | 4,8 | - | 6 | 5 | 8 | 9 | 10 | - |
| 25 | 9 | 8,2 | 13 | 16 | 14 | 17 | 8,4 | 10 | 14 | 21 | 27 | 35 |
| 40 | 14 | 12 | 23 | 24 | 29 | 31 | 13 | 17 | 22 | 30 | 33 | 49 |
| 50 | 29 | 35,4 | 50 | 51 | 51 | 53 | - | 37 | 61 | 57 | 73 | 90 |
| 80 | 58 | 55 | 100 | 105 | 119 | 125 | - | 75 | - | 94 | - | - |

10.0 Devices for use in explosion endangered environments (Only in conjunction with page 5ff)

| Materials | | | | |
|--------------------|--------------------|---|-----------------------|---|
| Model type | Housing | Diaphragm | Control block | Diaphragm plate |
| DL, DF, DZ, DJ, DP | FA/CA/SA, | Electr. conductive / electrically dissipative DEPA nopped E4® compound diaphragm, PTFE with EPDM back diaphragm, EPDM, NBR, NRS | Aluminium | Stainless steel, Zinc plated steel (CA, CX) |
| | CX, SX | | Bronze | |
| DL | SLV, UEV, SUV | | Stainless steel | Stainless steel |
| DL/DH | PL / TL | Non-electrically conductive / non-electrically dissipative * DEPA nopped S4, FKM, EPDM grey | PP-electr. conductive | PL / TL |
| PD | SS, FS, SL, SU, UE | | Stainless steel | Stainless steel |
| | CS | | | Zinc plated steel |
| | PL / TL | | | PL / TL |

* sizes 15 - 50 are approved for non-electrically conductive / non-electrically dissipative materials.

10.1 Example

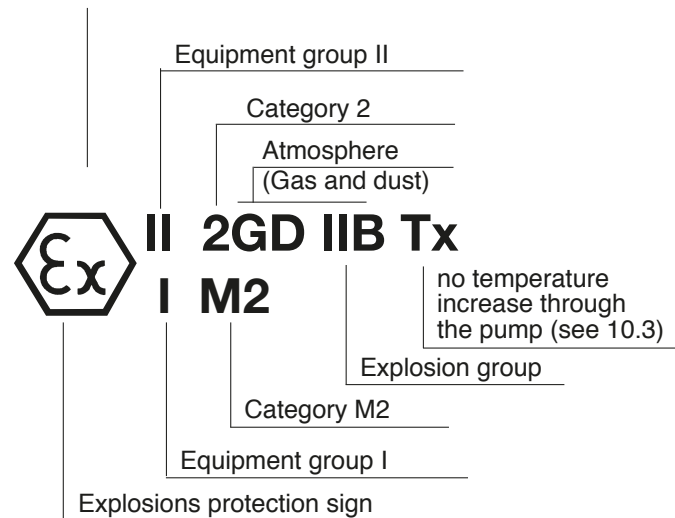

10.2 Classification of pump groups I and II

| Pump groups (Appendix I of EC-directive 94/9/EC) | | | | | | | |
|--|---|---|--------------------------|---|--------------------------|---|--------------------------|
| Group I (Mines, mine gases and dust) | | Group II (other explosive mixed gases/dust) | | | | | |
| Category M | | Category 1 | | Category 2 | | Category 3 | |
| 1 (Zone 0/20) | 2 (Zone 1/21) | G (Gas) (Zone 0) | D (Dust) (Zone 20) | G (Gas) (Zone 1) | D (Dust) (Zone 21) | G (Gas) (Zone 2) | D (Dust) (Zone 22) |
| for equipment providing very high protection in case of danger caused by an explosive atmosphere | for equipment providing very high protection in case of possible danger caused by an explosive atmosphere | for equipment providing extremely high protection when used in areas in which an explosive atmosphere may arise | | for equipment providing high protection when used in areas in which an explosive atmosphere may arise | | for equipment providing normal protection when used in areas in which an explosive atmosphere may arise | |

Pumps and pump units intended for use in potentially explosion endangered atmospheres are normally classified in group II, category 2. The user is solely responsible for classifying the group and the category.

10.3 Surface temperature

During intended use the pump will not get hot and thus has almost ambient or product temperature. All moving parts are cooled by the expanding drive air (gas). However, due to the high medium temperature the surface of the pump may also reach the temperature of the medium.

| Division of gasses and vapours | | | | | | | | |
|----------------------------------|-----|---------------------|--|---|--|---------------------------------|----------------|-------------------|
| Usability of operating equipment | | Explosion subgroups | T1 | T2 | T3 | T4 | T5 | T6 |
| IIC | IIA | IIA | Methane, Ethane, Propane, I-Butane, Acetone, Toluene, Ammonia, Propylene, Ethyl acetate | n-Butane, Ethanol, Methanol, i-Pentane, Isopropyl, 1-Butene, i-Octane, Cyclopentane | Petrol, Kerosene, Pentane, Hexane, n-Octane, Cyclohexane | Acetate aldehyde, Butyraldehyde | — | — |
| | IIB | IIB | City gas, carbon monoxide | Ethylene oxide, Ethylene, 2-Butene, 1-Propanol, Butadiene, 1,4-Dioxan | Nonane, Dimethyl ether, Hydrogen sulphide | Dimethyl ether, Dibuthylether | — | — |
| | IIC | IIC | Hydrogen | Acetylene | — | — | — | Carbon bisulphide |
| | | | Temperature class allocation of the gasses and vapours after ignition temperature | | | | | |
| | | | > 450°C | 300°C to 450°C | 200°C to 300°C | 135°C to 200°C | 100°C to 135°C | 85°C to 100°C |
| | | | Usability of operating equipment | | | | | |
| | | | T1 | T2 | | T3 | | |
| | | | T4 | | | T5 | | T6 |

DEPA® Air Operated Diaphragm Pumps

10.4 Devices for use in explosion endangered areas Supplement for type approved pumps of category 1 (see also page 6-7)



| | | |
|----------------------|----------------------|---|
| II 1 G IIB Tx | Pumps type: | DL..-SS-... |
| | for sizes: | 15, 25, 40, 50, 80 |
| | Diaphragm materials: | Electrically conductive / electrically dissipative DEPA nopped E4® compound diaphragm*, EPDM, NBR, PTFE* |
| | | *Size 80 only approved for electrically conductive fluids |


IIB: Explosion group

Tx: No temperature increase by operation of the pump. The temperature is solely determined by the environment or the product.

The waste air must be collected and discharged from the potentially explosive area (e.g. by means of an electrically conductive hose between pump and silencer).

- Microfilters are not permitted in the pump feed when DEPA nopped E4® compound diaphragms and PTFE diaphragms (size DL80) are used.
- Only conductive media may be pumped when using DEPA nopped E4® compound diaphragms and PTFE diaphragms (size DL80).


11.0 Tightening torques
Tightening torques series L, size 25-80

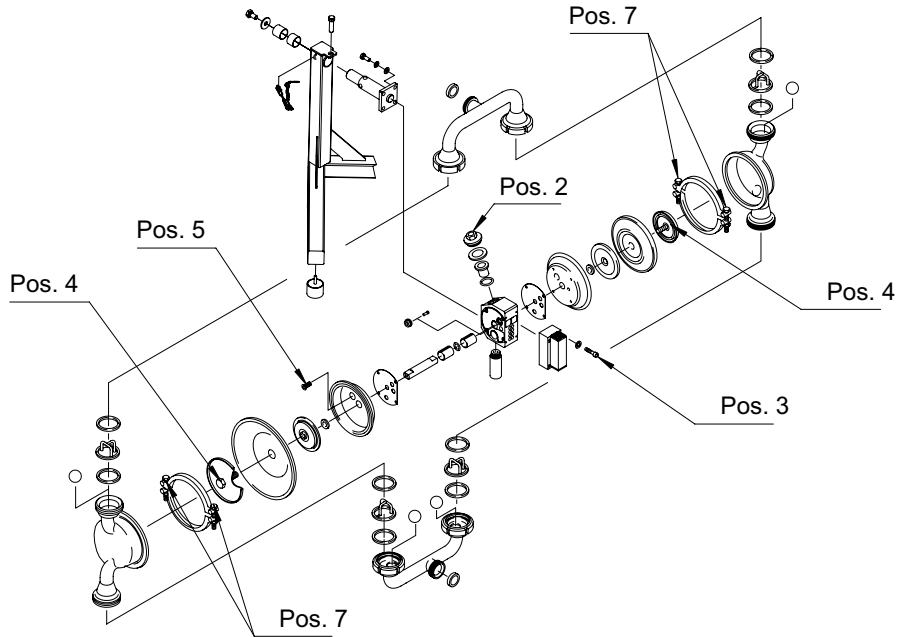

| Pump size | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos.4 | Air chamber Pos. 5 | Clamp band Pos. 7 |
|-----------|---------------------|---------------------|-----------------|-----------------------|----------------------|
| DL25-L | 50 Nm | 8 Nm | - | 20 Nm | max. 23 Nm |
| DL40-L | 50 Nm | 8 Nm | 90 Nm | 20 Nm | max. 23 Nm |
| DL50-L | 85 Nm | 8 Nm | 150 Nm | 39 Nm | max. 23 Nm |
| DL80-L | 85 Nm | 8 Nm | 150 Nm | 39 Nm | max. 23 Nm |


DEPA® Air Operated Diaphragm Pumps

Tightening torques series DH-UE, size 25-50

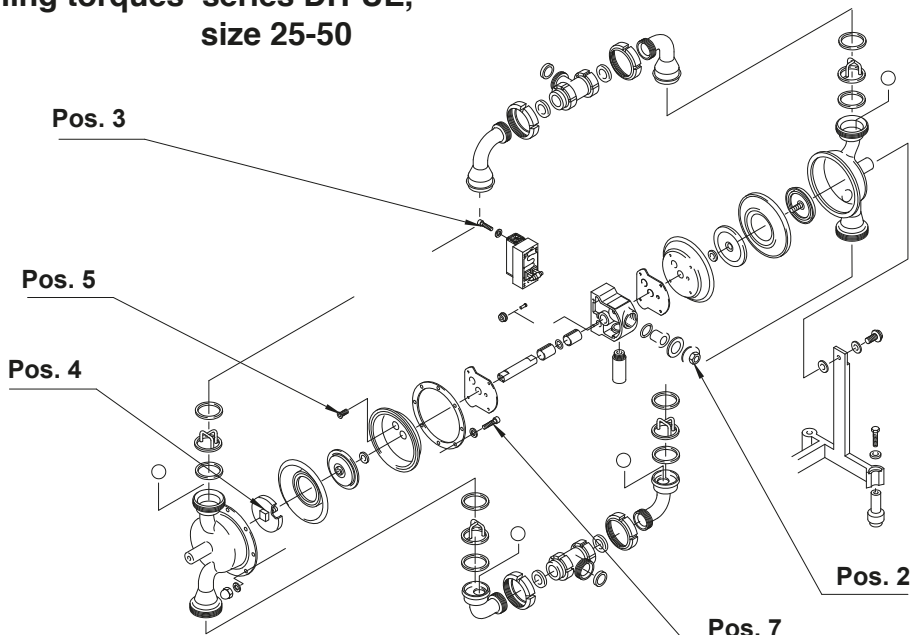


| Pump size | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos. 4 | Air chamber Pos. 5 | Pump chamber / Flange, Pos. 7 |
|-----------|---------------------|---------------------|------------------|-----------------------|----------------------------------|
| DH25-UE | 50 Nm | 8 Nm | 90 Nm | 20 Nm | 25 Nm |
| DH40-UE | 50 Nm | 8 Nm | 90 Nm | 20 Nm | 25 Nm |
| DH50-UE | 85 Nm | 8 Nm | 150 Nm | 39 Nm | 49 Nm |

Tightening torques series SF, size 25-50

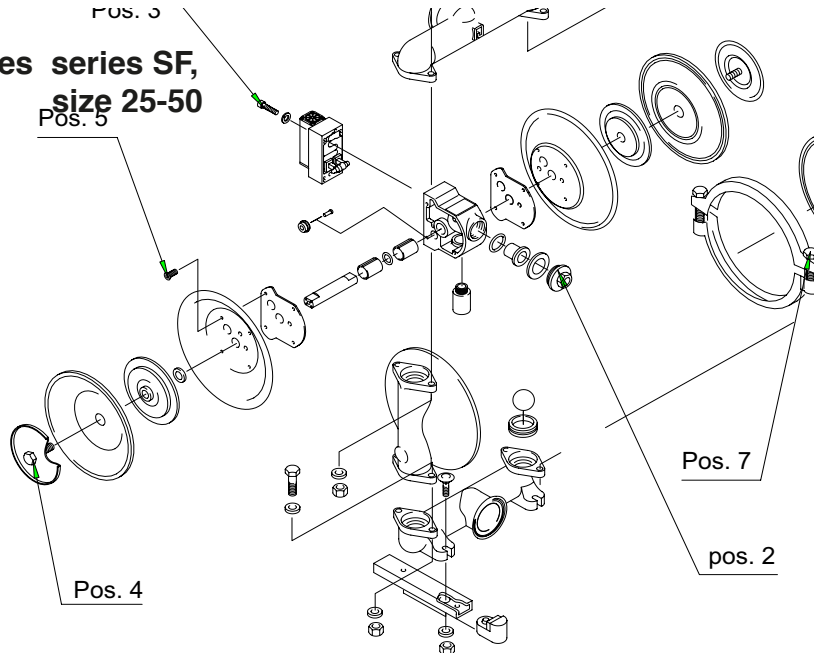


| Pump size | Suction / Discharge manifold, Pos. 1 | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos. 4 | Air chamber Pos. 5 | Clamp band Pos. 7 |
|-----------|---|---------------------|---------------------|------------------|-----------------------|----------------------|
| DL25-SF | 10 Nm | 50 Nm | 8 Nm | 70 Nm | 20 Nm | max. 23 Nm |
| DL40-SF | 25 Nm | 50 Nm | 8 Nm | 90 Nm | 20 Nm | max. 23 Nm |
| DL50-SF | 49 Nm | 85 Nm | 8 Nm | 150 Nm | 39 Nm | max. 23 Nm |

Tightening torques series M, size 15

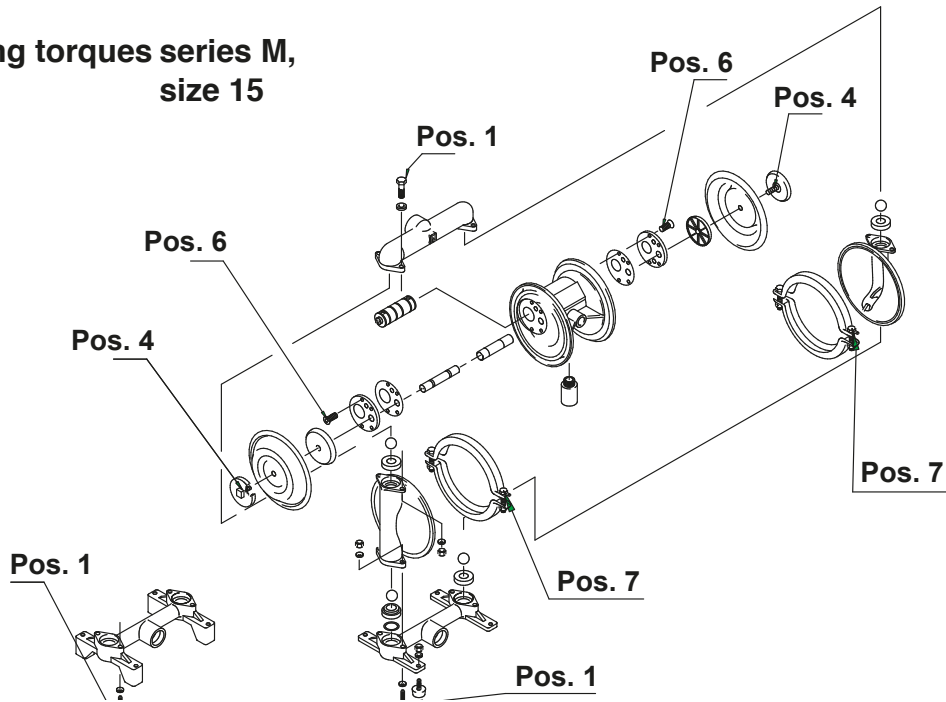

| Pump size | Suction / Discharge manifold, Pos. 1 | Piston Pos. 4 | Centre block cover Pos. 6 | Clamp band Pos. 7 |
|-----------|--------------------------------------|---------------|---------------------------|-------------------|
| DL15-M | 7 Nm | 6 Nm | 3 Nm | max. 23 Nm |


Tightening torques series M, size 25-80

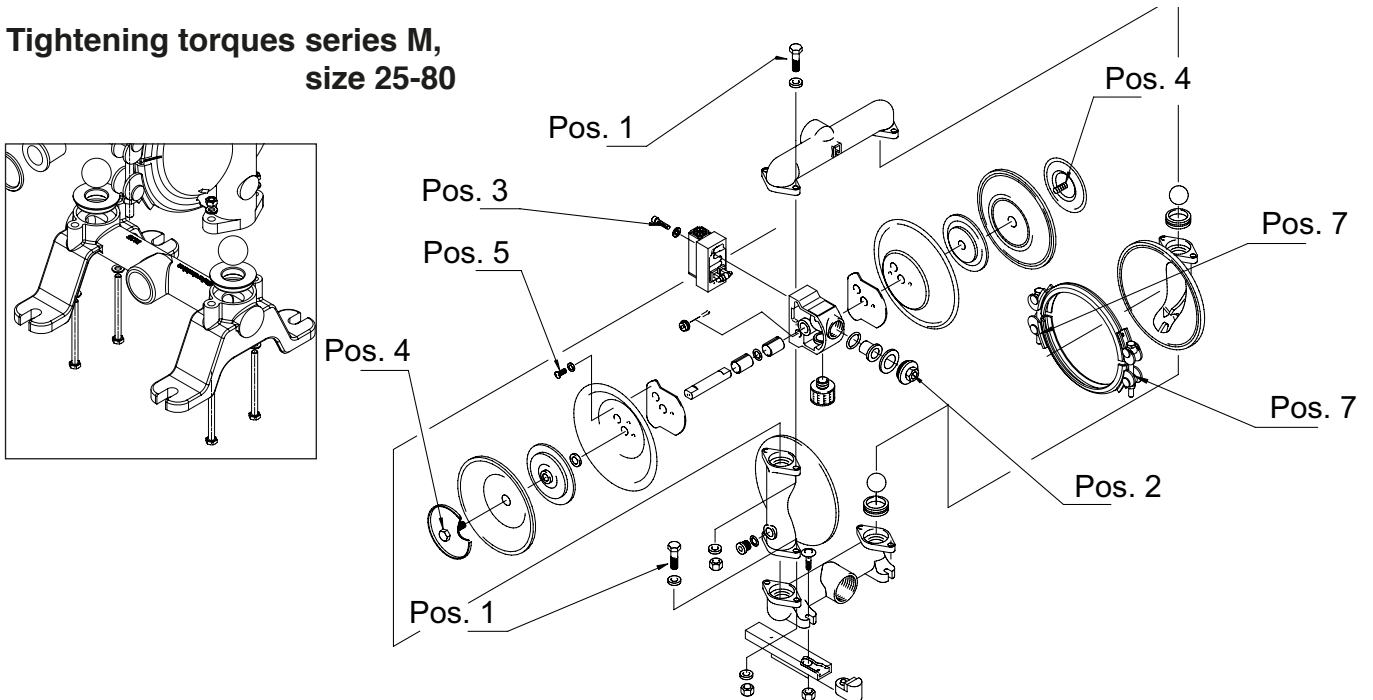

| Pump size | Suction / Discharge manifold, Pos. 1 | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos. 4 | Air chamber Pos. 5 | Clamp band Pos. 7 |
|-----------|--------------------------------------|------------------|------------------|---------------|--------------------|-------------------|
| DL25-M | 25 Nm | 50 Nm | 8 Nm | 70 Nm | 20 Nm | max. 23 Nm |
| DL40-M | 25 Nm | 50 Nm | 8 Nm | 90 Nm | 20 Nm | max. 23 Nm |
| DL50-M | 49 Nm | 85 Nm | 8 Nm | 150 Nm | 39 Nm | max. 23 Nm |
| DL80-M | 49 Nm | 85 Nm | 8 Nm | 150 Nm | 39 Nm | max. 23 Nm |

DEPA® Air Operated Diaphragm Pumps

Tightening torques series P, size 15-80

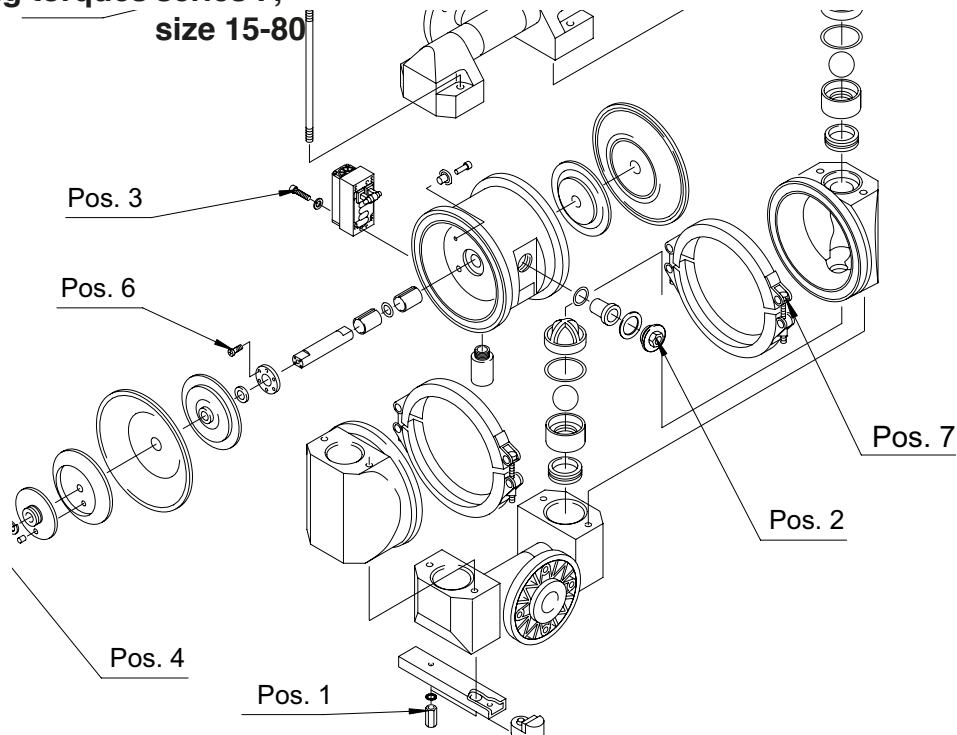


| Pump size | Anchor rod Pos. 1 | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos. 4 | Centre block cover, Pos. 6 | Clamp band Pos. 7 |
|-----------|----------------------|---------------------|---------------------|------------------|-------------------------------|----------------------|
| DL15-P | 10 Nm | - | - | 6 Nm | 2,5 Nm | 7 Nm |
| DL25-P | 10 Nm | 50 Nm | 8 Nm | 70 Nm | 2,5 Nm | 8 Nm |
| DL40-P | 25 Nm | 50 Nm | 8 Nm | 90 Nm | 2,5 Nm | 10 Nm |
| DL50-P | 49 Nm | 85 Nm | 8 Nm | 150 Nm | 5,5 Nm | 12 Nm |
| DL80-P | 49 Nm | 85 Nm | 8 Nm | 150 Nm | 5,5 Nm | 15 Nm |


Tightening torques series PT, size 15-80 (drawing see above)

| Pump size | Anchor rod Pos. 1 | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos. 4 | Centre block cover, Pos. 6 | Clamp band Pos. 7 |
|-----------|----------------------|---------------------|---------------------|------------------|-------------------------------|----------------------|
| DL15-PT | 10 Nm | - | - | 5 Nm | 2,5 Nm | 7 Nm |
| DL25-PT | 10 Nm | 50 Nm | 8 Nm | 70 Nm | 2,5 Nm | 8 Nm |
| DL40-PT | 22 Nm | 50 Nm | 8 Nm | 90 Nm | 2,5 Nm | 10 Nm |
| DL50-PT | 25 Nm | 85 Nm | 8 Nm | 150 Nm | 5,5 Nm | 12 Nm |

Tightening torques series P, Typ DH, size 50

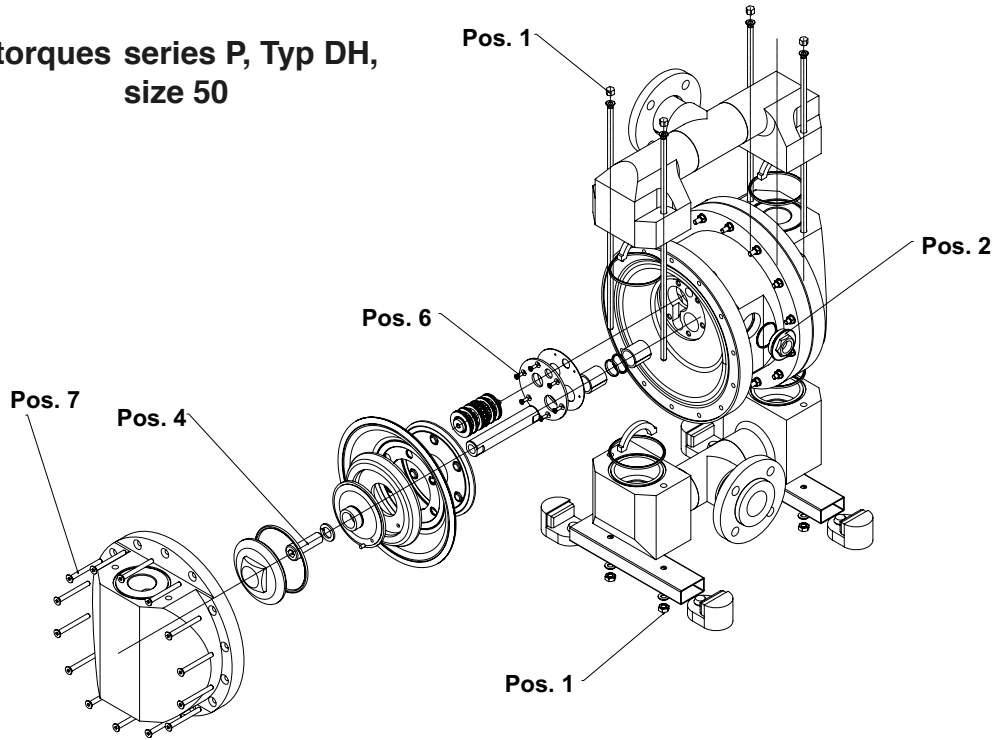

| Pump size | Anchor rod Pos. 1 | Air inlet Pos. 2 | Air valve Pos. 3 | One piece diaphragm Pos. 4 | Piston Pos. 4 | Centre block cover Pos. 6 | Pump chamber/ Centre block Pos. 7 |
|-----------|----------------------|---------------------|---------------------|-------------------------------|------------------|------------------------------|---|
| DH50-P | 35 Nm | 85 Nm | 8 Nm | - | 150 Nm | 5,5 Nm | 12 Nm |

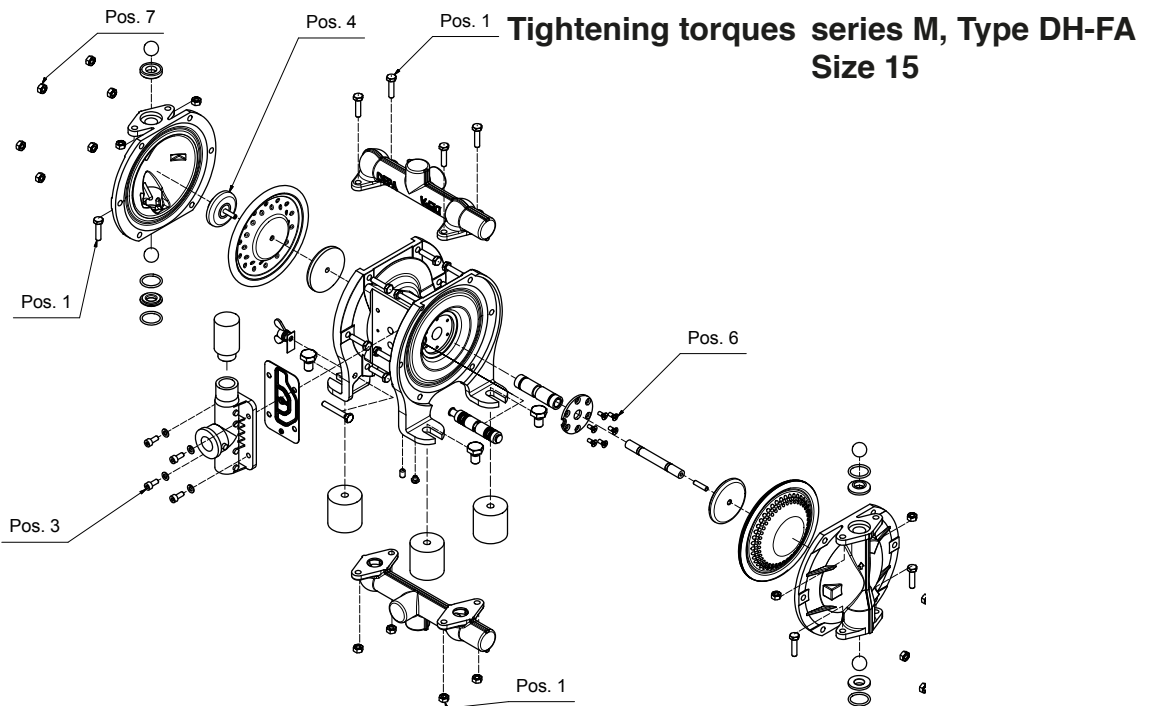


Tightening torques series M, Type DH-FA Size 15

| Pump size | Suction / Discharge manifold Pos. 1 | External air valve Pos. 3 | Piston rod Pos. 4 | Centre block cover Pos. 6 | Pump chamber Pos. 7 |
|-----------|--|------------------------------|----------------------|------------------------------|------------------------|
| DH15-FA | 9 Nm | 8 Nm | 6 Nm | 3 Nm | 9 Nm |


DEPA® Air Operated Diaphragm Pumps

Tightening torques series M, Type DH-FA Size 25-80

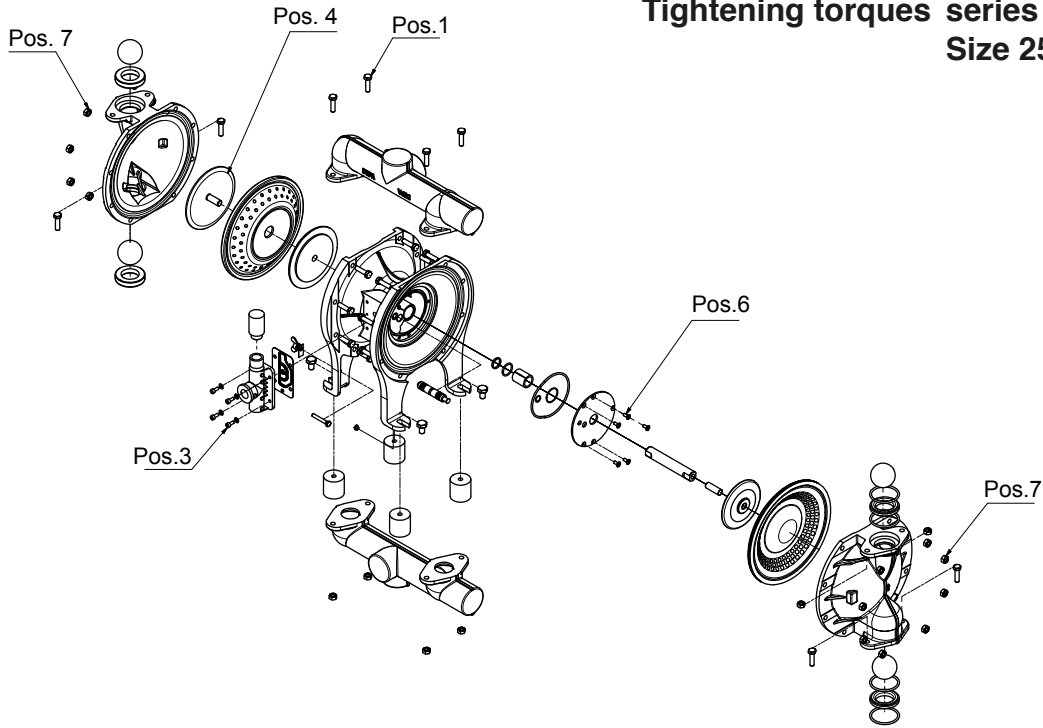


| Pump size | Suction / Discharge manifold Pos. 1 | External air valve Pos. 3 | Piston rod Pos. 4 | Centre block cover Pos. 6 | Pump chamber Pos. 7 |
|-----------|--|------------------------------|----------------------|------------------------------|------------------------|
| DH25-FA | 25 Nm | 8 Nm | 70 Nm | 5 Nm | 25 Nm |
| DH40-FA | 25 Nm | 8 Nm | 90 Nm | 5 Nm | 25 Nm |
| DH50-FA | 50 Nm | - | 150 Nm | 5 Nm | 50 Nm |
| DH80-FA | 50 Nm | - | 150 Nm | 5 Nm | 50 Nm |

Tightening torques series P, type DH-PT/-TL size 15-40

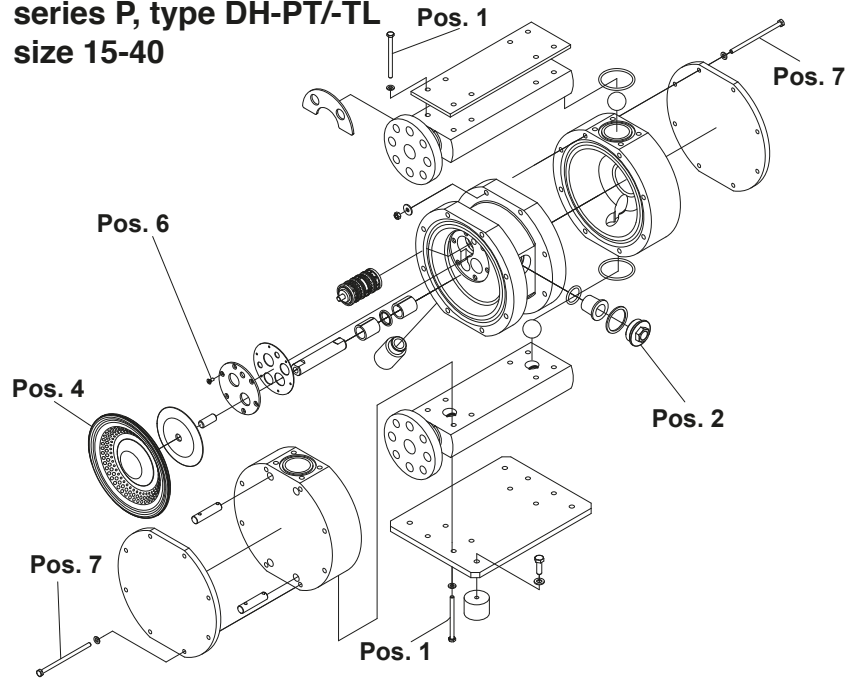

| Pump size | Manifold / Pump chamber Pos. 1 | Air inlet Pos. 2 | Diaphragm Pos. 4 | Centre block cover Pos. 6 | Pump chamber / Centre block Pos. 7 |
|------------|--------------------------------------|---------------------|---------------------|---------------------------------|--|
| DH15-PT/TL | 3 Nm | 50 Nm | 1 Nm | 2,5 Nm | 6 Nm |
| DH25-PT/TL | 5 Nm | 50 Nm | 1 Nm | 2,5 Nm | 6 Nm |
| DH40-PT/TL | 5 Nm | 50 Nm | 1 Nm | 2,5 Nm | 6 Nm |

Tightening torques series P, type PM, size 15-40

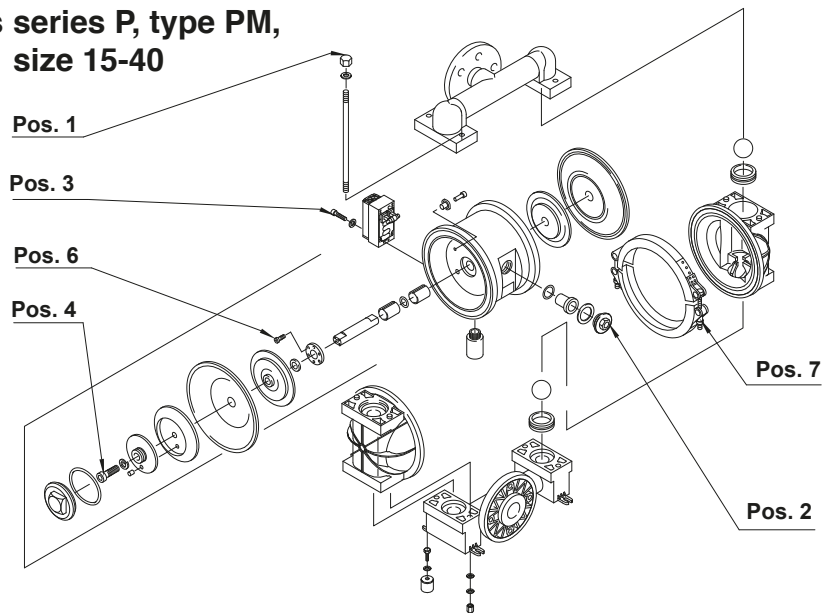

| Pump size | Anchor rod Pos. 1 | Air inlet Pos. 2 | Air valve Pos. 3 | Piston Pos. 4 | Centre block cover, Pos. 6 | Clamp band Pos. 7 |
|-----------|----------------------|---------------------|---------------------|------------------|-------------------------------|----------------------|
| DL15-PM | 8 Nm | - | - | 6 Nm | 2,5 Nm | 7 Nm |
| DL25-PM | 10 Nm | 50 Nm | 8 Nm | 70 Nm | 2,5 Nm | 8 Nm |
| DL40-PM | 25 Nm | 50 Nm | 8 Nm | 90 Nm | 2,5 Nm | 10 Nm |

Note on Declaration of Harmlessness

We want to protect our employees against dangers through contaminated devices and allow the timely handling of your return.

Please understand that for this reason we can only accept your shipment upon submission of our declaration of non-objection including return number.

Upon our receipt of the filled-out declaration of non-objection, you will receive a return number from us.

Please affix the same then to the package so that it is readily visible from the outside.

**This is the translation of the original operating and installation instructions for
DEPA Air Operated Diaphragm Pumps.**

**For the original version in German, please refer to
www.cranecempharma.com**

Declaration of Harmlessness

Please send this declaration to your CPFT contact by Email or fax before sending the goods.

Crane Process Flow Technologies GmbH

Heerdter Lohweg 63-71
40549 Düsseldorf
Fax +49 (0) 211 5956 139

We want to protect our employees as much as possible against any risks arising from contaminated equipment. Therefore, please understand that we will only be able to carry out inspections/repairs after we have received this fully filled-in and signed declaration. We cannot accept media samples.

Concerning the return dated _____

Delivery note No. _____

Pump type / spare parts _____

Drive type _____

With my signature I declare,

- that the returned pump/drive has been thoroughly cleaned and decontaminated before shipment, that the returned pump/drive will not pose any dangers caused by bacteriological, virological, chemical or radioactive contamination, that I am authorized to issue such declarations for the company concerned.

For repair service, we kindly ask you to supply us with the following additional information:

Detected defect

Which media was used

| |
|---------------|
| Company stamp |
|---------------|

Name _____

Position _____

Date/ signature _____

You can request the declaration of non-objection through our contact listed below.

ALOYCO • CENTER LINE • DUO-CHEK • FLOWSEAL • JENKINS • KROMBACH • NOZ-CHEK • PACIFIC • STOCKHAM • TRIANGLE
DEPA • ELRO • PSI • RESISTOFLEX • RESISTOPURE • REVO • SAUNDERS • XOMOX

Crane Process Flow Technologies GmbH, Postfach 11 12 40, D-40512 Düsseldorf, Heerdter Lohweg 63-71, D- 40549 Düsseldorf,
Düsseldorf District Court, HR B 24702, Managing Director: Hans D. Ptak

Crane Process Flow Technologies GmbH

P.O.Box 11 12 40, D-40512 Düsseldorf
Heerdter Lohweg 63-71, D-40549 Düsseldorf
Phone +49 211 5956-0
infoDus@cranecpe.com
www.depapumps.com
www.cranecpe.com

We reserve the right to change all technical information.

