

RESISTOFLEX®

CRC-B TWISTER® EPDM Rubber Covered Hose

DATASHEET



www.cranecpe.com

Inner Core: Antistatic seamless convoluted Teflon™ PTFE
Reinforcement: Stainless steel wire wrap with EDM cover
Temperature: 0°F to 300°F

CONSTRUCTION

Unique and patented design incorporating a seamless, helically formed convoluted Teflon™ PTFE tube reinforced with a stainless steel wire wrap, tire cord, and EPDM rubber cover with crimp style fittings.


BENEFITS

- Ultra Flexible - Twister requires a minimum amount of force to flex, making this an excellent choice for handling and reducing strain on adjoining equipment
- 1:1 nominal diameter to bend radius – A 2" hose has a 2" bend radius!
- Virtually kink-proof design
- Antistatic Teflon™ PTFE inner core provides outstanding corrosion resistance and material compatibility
- Open pitch, helical convolutions for easy cleaning
- Tough EPDM cover provides durability and easy handling

APPLICATIONS


Versatile design used where a very flexible connection is needed to transfer corrosive, or hazardous media. Twister is commonly selected for rail and truck loading/unloading stations and transfer panels.

FITTINGS: Crimped




(consult factory for availability)

PRESSURE RATINGS

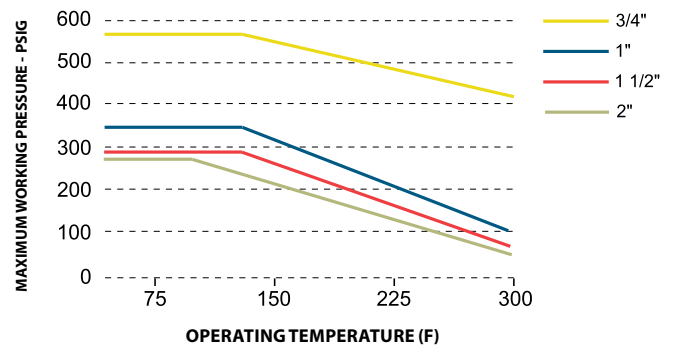

NOTE: For assemblies, pressure ratings of fittings may be less than for the hose.

VACUUM RATINGS

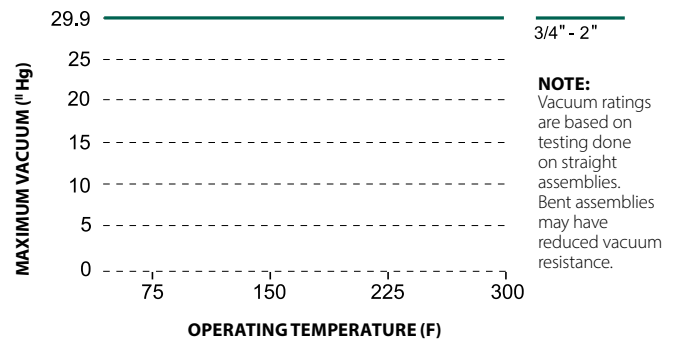

NOTE: Vacuum ratings are based on testing done on straight assemblies. Bent assemblies may have reduced vacuum resistance.

Size		Hose I.D.		Hose O.D.		Min. Bend Radius		Max. Working Pressure at 70°F (21°C)		Burst Pressure at 70°F (21°C)		Weight Lbs / Ft
Inch	DN	Inch	MM	Inch	MM	Inch	MM	PSIG	BAR	PSIG	BAR	
3/4	20	0.750	19	1.250	31.7	0.750	19	570	39.3	2280	157.2	0.49
1	25	1.000	25	1.480	37.5	1.000	25.4	350	24.1	1400	96.5	0.62
1-1/2	40	1.500	38	2.100	53.3	1.500	38.1	295	20.33	1180	81.4	1.15
2	50	2.000	51	2.780	70.6	2.000	50.8	275	19	1100	75.8	1.65



CRANE CHEMPHARMA & ENERGY
 One Quality Way
 Marion, NC
 USA 28752

Crane Company, and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Company reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All trademarks in this material are the property of the Crane Company or its subsidiaries. The Crane and Crane brands logotype (ALOYCO®, BAUM®, CENTER LINE®, CRANE®, CRYOWORKS®, DEPA IonTec™ & ELRO®, DOPAK®, DUO-CHEK®, FLOWSEAL®, GYROLOK®, GO REGULATOR®, HOKE®, JENKINS®, KROMBACH®, NOZ-CHEK®, PACIFIC®, RESISTOFLEX®, REVO®, SAUNDERS®, STOCKHAM®, TECHNIFAB®, TEXAS SAMPLING®, WESTLOCK®, WTA®, and XOMOX®) are registered trademarks of Crane Company. All rights reserved.