


# XOMOX®



## WTA® CHLORVENTILE

Bellows Sealed Globe Valves provide the highest fugitive emission protection for use in Chlor-Alkali applications.

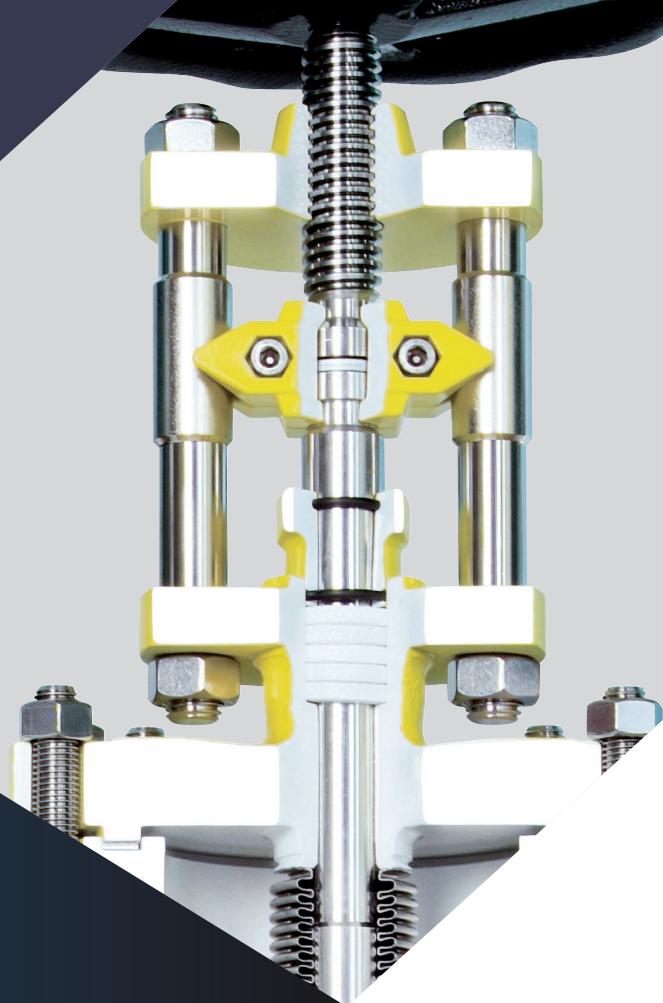

### KEY FEATURES INCLUDE

- 1 **SUPERIOR SAFETY SEALING SYSTEM** with multiple walled bellows, gland packing, metal back seat, two-part rising stem, stellite coated, conical shaped piston and seat.
- 2 Compliant with the demanding **EURO CHLOR AND CHLORINE INSTITUTE** Specifications for Bellows Sealed
- 3 Globe Valves used for Chlor-Alkali applications. Manufactured and tested in an ISO compliant clean room with ultrasonic cleaning system to ensure safety, quality, and **GAS-LEAK TIGHTNESS**.

**CRANE**®



[www.cranecpe.com](http://www.cranecpe.com)

# WTA® Chlorine Valves

## Product Features

- Bonnet flange in tongue and groove design; stud bolted, with a nut at each end; bonnet gasket coated with PTFE.
- Bellows anti-torque device with integrated position indicator (for open and closed positions)
- Safety gland packing made of PTFE-silk; gland follower with double O-ring seal to prevent ingress of medium into the packing area.
- Protected multiple-wall bellows made of 2.4819/Hastelloy® C276, designed for 10,000 cycles, installed beyond main flow area.
- Disc with conical plug, sealing surface hardened with Stellite® 6, seat hardened with Stellite® 21.

## Typical Applications

Processing systems handling liquid chlorine or dry chlorine gas, and similar hazardous media.

## Temperature Range

Standard	Unit	Temp. Carbon Steel	
Euro Chlor	°C	Tmin	-40
		Tmax	+120
GEST	°F	Tmin	-40
		Tmax	+248

Other temperature ranges are available without Euro Chlor Certificate.

## Special Options

- Pneumatically actuated according to GEST
- Complete internals in 2.4819/Hastelloy® C276 available on request

## Compliance

- Chlorine Institute Pamphlet 6 and Euro Chlor GEST specification

Hastelloy® is a trademark of Haynes International Inc.  
Stellite® is a registered trademark of Deloro Stellite.

## Size Range

DN 25, 40, 50, 80, 100, 150 / NPS 1", 1 ½", 2", 3", 4", 6"  
Other sizes are available on request

## Pressure Rates

PN 40 and Class 300  
Other classes are available on request

## Materials of Construction

Low temperature Carbon Steel 1.6220 / LCB / LCC  
Other sizes are available on request

## Body Configurations

Straight type

## End Connections

Flange design in accordance with EN 1092-1 and ASME B 16.5.

## Post-Manufacture Handling and Final Tests

- Drying at a temperature of 120°C (248°F) for at least 3 hours
- Introduction of drying agents (Silica gel) into the valve
- Blanking of inlet and outlet orifices with suitable gaskets and bolted flanges to avoid entry of moisture into the valve
- Unfinished surfaces protected against rust
- Lubricated with chlorofluorinated grease

## Testing/Marking

- Tests and design per Euro Chlor GEST recommendation and Chlorine Institute Pamphlet 6
- Quality level 3 of ASTM E446 or equivalent standard for body and bonnet
- TÜV type test approval to VdTÜV 1065 available
- Standard tests to DIN EN 12266 Part 1, shell and leak test acc. to item P10/P11/P12 (leakage rate A)

**CRANE CHEMPHARMA & ENERGY**  
Xomox International GmbH & Co. OHG  
Von-Behring-Straße 15  
8131 Lindau (Bodensee)  
Germany  
Tel: +49 8382 702 0  
Fax: +49 8382 702 144

Crane Company, and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Company reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All trademarks in this material are the property of the Crane Company or its subsidiaries. The Crane and Crane brands logotype (ALOYCO®, BAUM®, CENTER LINE®, CRANE®, CRYOWORKS®, DEPA® & ELRO®, DOPAK®, DUO-CHEK®, FLOWSEAL®, GYROLOK®, GO REGULATOR®, HOKE®, JENKINS®, KROMBACH®, NOZ-CHEK®, PACIFIC VALVES®, RESISTOFLEX®, REVO®, SAUNDERS®, STOCKHAM®, TECHNIFAB®, TEXAS SAMPLING®, WESTLOCK CONTROLS®, WTA®, and XOMOX®) are registered trademarks of Crane Company. All rights reserved.